


Features

- Surface mounted system for retrofit installation
- Firmly fixed Santoprene gasket offer movement tractability without shearing or breaking
- System is suitable for full seismic movements
- Commonly used system that is easy to install and maintain
- Unique design for gypsum board & gypsum tile ceiling
- Fire Barriers are optionally available

Straight Application FBS

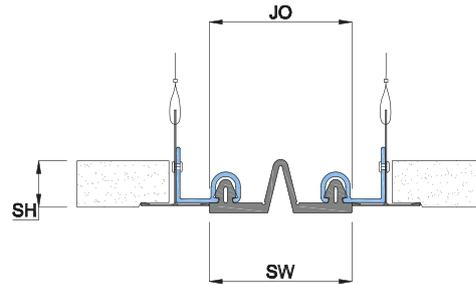


FB
Series

INT.
Application

Seismic
Movement

CEILING
USE

Corner Application FBC

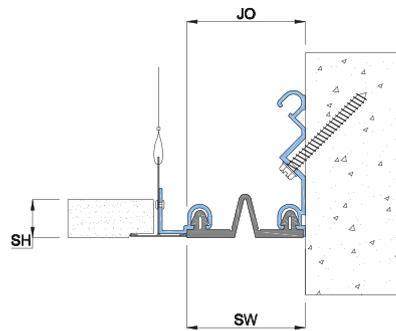

Seal
Colors:

BK

BG

WH

GY

Details

Usage : Ceiling

Joint width : 1" - 6"

Optional : Fire Barrier

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
		Millimeter			Horizontal	Vertical	Shear	
Straight (S)	FBS 01	38	16	38	50	50	Excellent	*
	FBS 02	51	16	51	50	50	Excellent	*
	FBS 03	76	16	76	50	50	Excellent	*
	FBS 04	102	16	102	50	50	Excellent	*
	FBS 06	152	16	152	50	50	Excellent	*
Corner (C)	FBC 01	42	16	42	50	50	Excellent	*
	FBC 02	51	16	51	50	50	Excellent	*
	FBC 03	76	16	76	50	50	Excellent	*
	FBC 04	102	16	102	50	50	Excellent	*
	FBC 06	152	16	152	50	50	Excellent	*

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.