
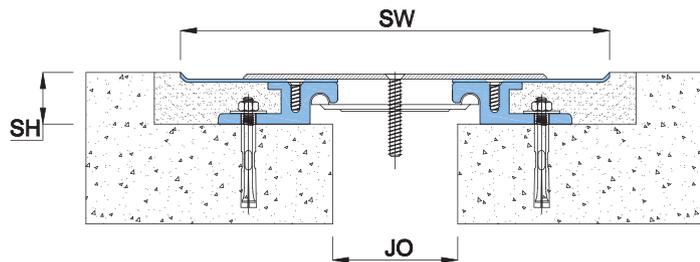


Features

- System designed to be installed in recessed floor
- Central plate of 304 or 316 grade Stainless Steel and wings of construction grade aluminium
- Steel central flanges allows swift shift between positive and negative movements
- System allows full seismic movements
- Load rated for heavy vehicular traffic
- Vapor and Fire Barriers are optionally available
- System allows excellent shear movements

Straight Application GWS

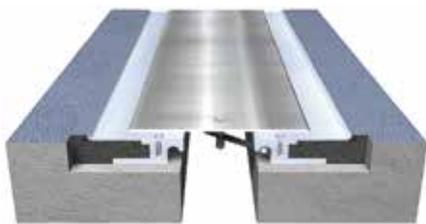

GW
Series



EXT.
Application

INT.
Application

Seismic
Movement

FLOOR
USE

Corner Application GWC

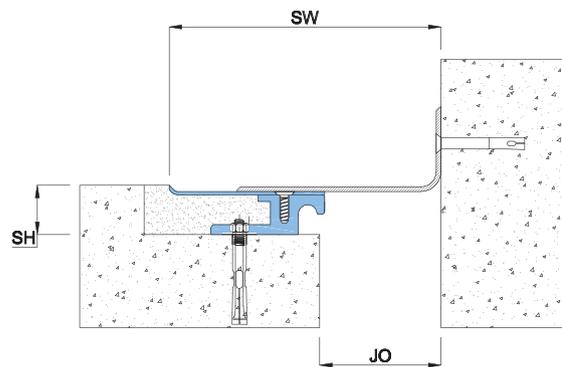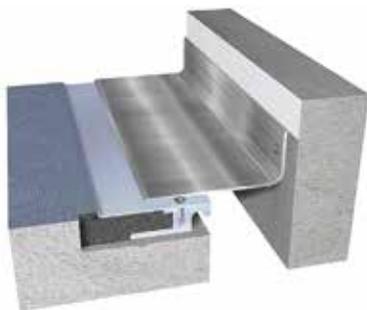

Details

Usage : Floor

Joint width : 2"- 12"

Optional : Vapor/Fire Barrier

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
					Horizontal	Vertical	Shear	
Straight (S)	GWS 02	51	30	201	50	50	Excellent	3.5
	GWS 03	76	31	261	50	50	Excellent	3.5
	GWS 04	102	31	322	50	50	Excellent	3.5
	GWS 06	152	37	452	50	50	Excellent	3
	GWS 08	203	37	578	50	50	Excellent	3
	GWS 10	254	37	714	50	50	Excellent	3
Corner (C)	GWC 02	51	30	129	50	13	Excellent	3.5
	GWC 03	76	31	173	50	13	Excellent	3.5
	GWC 04	102	31	226	50	13	Excellent	3.5
	GWC 06	152	37	331	50	13	Excellent	3
	GWC 08	203	37	431	50	13	Excellent	3
	GWC 10	254	37	531	50	13	Excellent	3
GWC 12	305	40	639	50	13	Excellent	3	

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.