
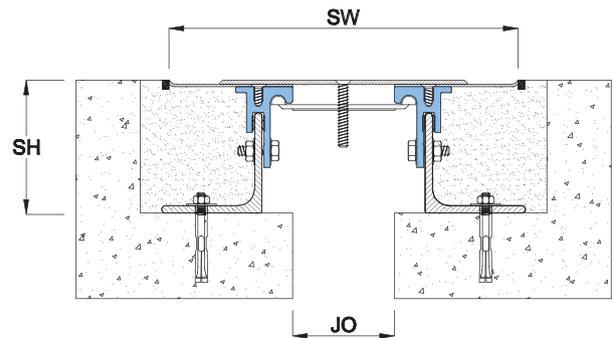


Features

- System designed to be installed in recessed floor
- Central plate and wings of grade 304 or 316 Stainless Steel
- Steel central flanges allows swift shift between positive and negative movements
- Load rated for heavy vehicular traffic
- Vapor and Fire Barriers are optionally available
- System allows excellent shear movements
- System specially designed to accommodate sub-floors of variable heights
- System allows full seismic movements

Straight Application GFS

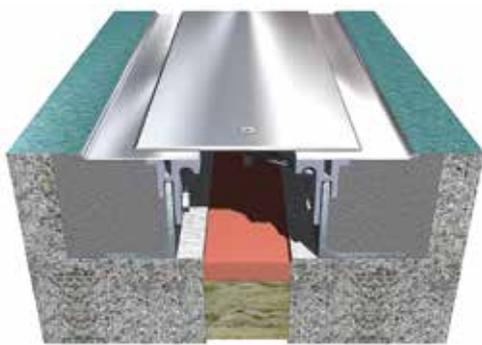

GF Series



EXT. Application

INT. Application

Seismic Movement

FLOOR USE

Corner Application GFC

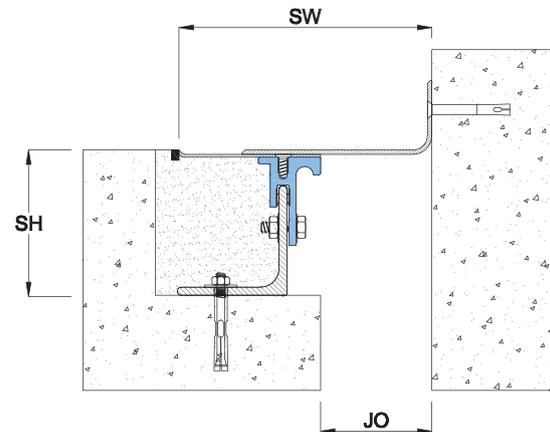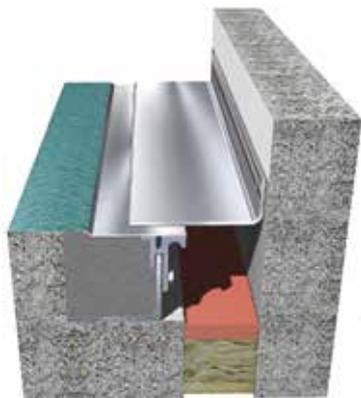

Details

Usage : Floor

Joint width : 2"-12"

Optional : Vapor/Fire Barrier

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
					Millimeter		Horizontal	
Straight (S)	GFS 02	51	94	201	50	50	Excellent	3.5
	GFS 03	76	94	261	50	50	Excellent	3.5
	GFS 04	102	94	322	50	50	Excellent	3.5
	GFS 06	152	94	452	50	50	Excellent	3
	GFS 08	203	94	578	50	50	Excellent	3
	GFS 10	254	94	714	50	50	Excellent	3
GFS 12	305	94	830	50	50	Excellent	3	
Corner (C)	GFC 02	51	94	129	50	13	Excellent	3.5
	GFC 03	76	94	173	50	13	Excellent	3.5
	GFC 04	102	94	225	50	13	Excellent	3.5
	GFC 06	152	94	330	50	13	Excellent	3
	GFC 08	203	94	430	50	13	Excellent	3
	GFC 10	254	94	531	50	13	Excellent	3
GFC 12	305	94	639	50	13	Excellent	3	

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.