
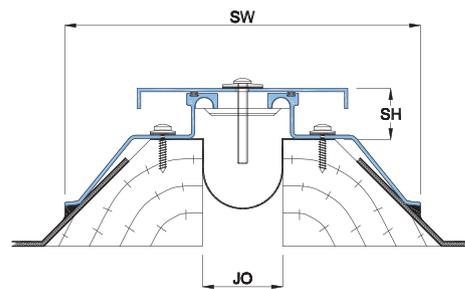


**Features**

- System designed for surface mount installation
- All aluminium system recommended for harsh weather conditions
- Steel central flanges allows swift shift between positive and negative movements
- Extra-large sizes available
- System is suitable for full seismic movements
- Suitable for external applications
- Vapor Barrier is standard with this system
- Stainless Steel cover plate optionally available

**Straight Application DAS**

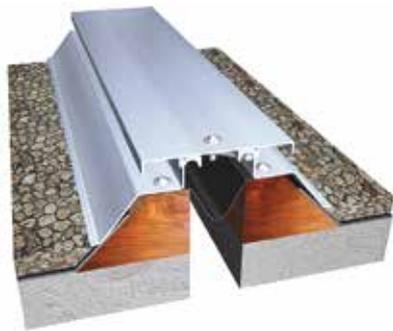

Powder Coat Finish:  
Any RALColor




Anodized  
Finishes:



- DA Series
- EXT. Application
- Seismic Movement
- ROOF USE

**Corner Application DAC**

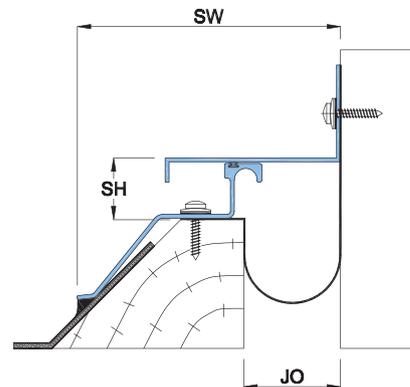

**Details**

Usage : Roof

Joint width : 2"-12"

Optional : Fire Barrier

Wider Joint Cover available at request

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
					Millimeter			
					Horizontal	Vertical	Shear	
Straight (S)	DAS 02	51	33	226	50	50	Excellent	*
	DAS 03	76	33	251	50	50	Excellent	*
	DAS 04	102	33	277	50	50	Excellent	*
	DAS 06	152	33	327	50	50	Excellent	*
	DAS 08	203	33	378	50	50	Excellent	*
Corner (C)	DAS 12	305	33	400	50	50	Excellent	*
	DAC 02	51	33	140	50	50	Excellent	*
	DAC 03	76	33	165	50	50	Excellent	*
	DAC 04	102	33	200	50	50	Excellent	*
	DAC 06	152	33	250	50	50	Excellent	*
	DAC 08	203	33	300	50	50	Excellent	*
	DAC 12	305	33	400	50	50	Excellent	*

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.