


## Features


- System designed to be installed in recessed floor
- Exceptionally designed for Carpet / PVC floor finishes
- Extremely thin sight line
- No bump structure is ADA compliant
- System allows full seismic movements
- System allows excellent shear movement
- Suitable for heavy pedestrian traffic and hand trollies
- Vapor and Fire Barriers are optionally available

### Straight Application CPS

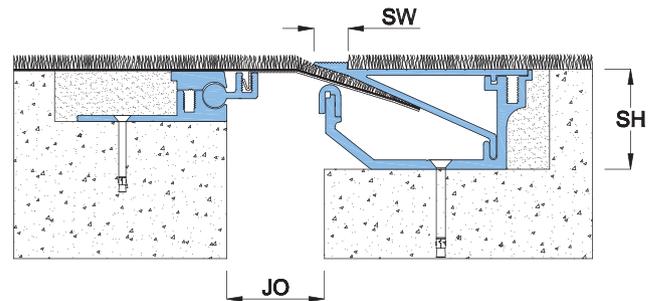

- CP Series
- INT. Application
- Seismic Movement
- FLOOR USE

### Corner Application CPC

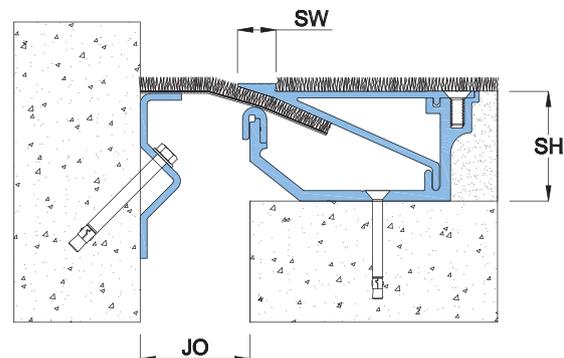

## Details

Usage : Internal Floor

Joint width : 2" - 3"

Optional : Vapor/Fire Barrier

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
		Millimeter			Horizontal	Vertical	Shear	
Straight (S)	CPS 02	51	50	17	50	50	Excellent	1
	CPS 03	76	50	17	50	50	Excellent	1
Corner (C)	CPC 02	51	50	17	50	50	Excellent	1
	CPC 03	76	50	17	50	50	Excellent	1

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.