

Features

- System designed to be installed in recessed floor
- Available in 304 or 316 grade, Stainless Steel
- Compression seal convenient, durable, waterproof expansion joint
- System allows full seismic movements
- Load rated for heavy vehicular traffic
- Fire Barriers is optionally available

Straight Application FUS




FU
Series

EXT.
Application

INT.
Application

Thermal
Movement

FLOOR
USE

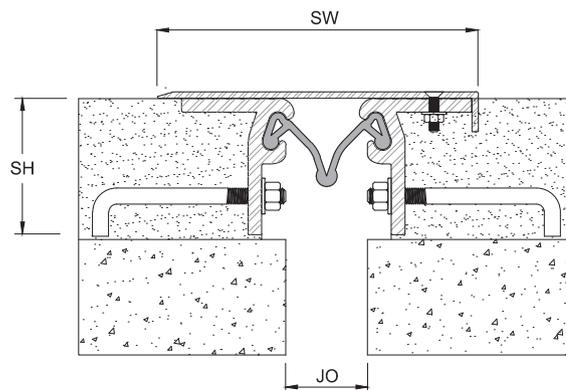

Details

Usage : Floor

Joint width : 1" - 4"

Optional : Fire Barrier

Application	Code	JO	SH	SW	± Movement (%)			Load
					Horizontal	Vertical	Shear	
Straight (S)	FUS 01	25	85	175	50	*	Excellent	Vehicular
	FUS 02	51	85	200	50	*	Excellent	Vehicular
	FUS 03	76	85	225	50	*	Excellent	Vehicular
	FUS 04	102	85	250	50	*	Excellent	Vehicular

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.