

Features

- System designed for external floor & wall applications
- Waterproof / Watertight
- Excellent for seamless installation in curves and radius
- UV stabilized
- Safe for potable water
- System allows full seismic movements
- System allows excellent shear movements
- Suitable for interior / exterior applications

Straight Application IAS



IA Series


EXT. Application

INT. Application

Seismic Movement

FLOOR USE

WALL USE

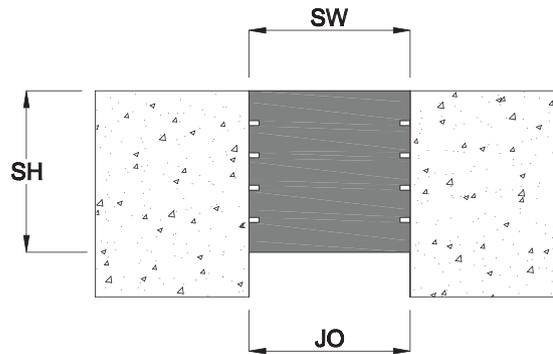

Details

Usage : Floor/Wall

Joint width : 1" - 8"

Optional : Fire Barrier

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
		Millimeter			Horizontal	Vertical	Shear	
Straight (S)	IAS 01	25	50	25	50	50	Excellent	*
	IAS 02	51	50	51	50	50	Excellent	*
	IAS 03	76	75	76	50	50	Excellent	*
	IAS 04	102	90	102	50	50	Excellent	*
	IAS 05	127	102	127	50	50	Excellent	*
	IAS 06	152	102	152	50	50	Excellent	*
	IAS 07	178	102	178	50	50	Excellent	*
	IAS 08	203	130	203	50	50	Excellent	*

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.