


## Features

- System designed for indoor/outdoor application
- Double component nosing
- Heavy nosing design and in-situ installation makes this product most desirable for heavy duty applications
- Mixture of carborundum chips and epoxy is filled in 21/50" (10.5mm) wide compartments for robust design and rapid response
- Suitable for heavy-duty pedestrian traffic
- In-situ installation designed for use with poured or precast concrete, terrazzo, steel pan cement filled stairs
- Easy installation
- 4" (102mm) tread area
- 13/25" (13.1mm) riser area
- Standard profile length 10' (3 meters)
- Factory cut option available
- Made of construction grade aluminum alloy 6063 T6

## SNG 04

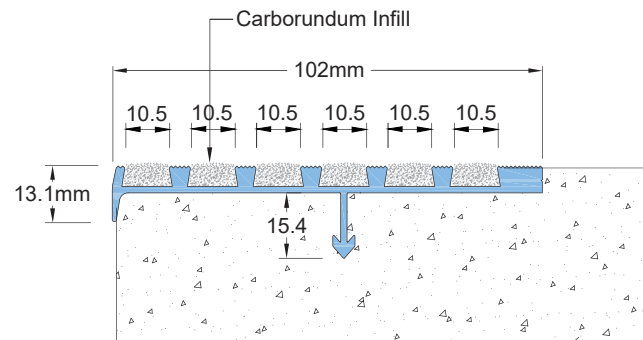

### Color Options:



MILL FINISH

Special Note: Customer is encouraged to locally source anchors and construction grade external adhesive for fixing because the local conditions vary from country to country