
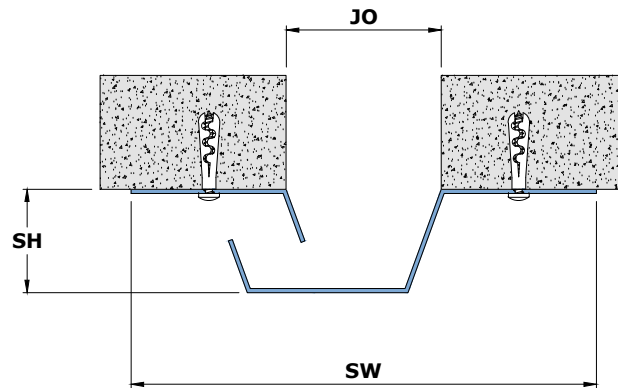


Features

- System is designed for under-slab installation
- Aluminum water gutter system
- Easy to install and maintain
- System allows full seismic movements
- System allows excellent shear movements

Straight Application WPS

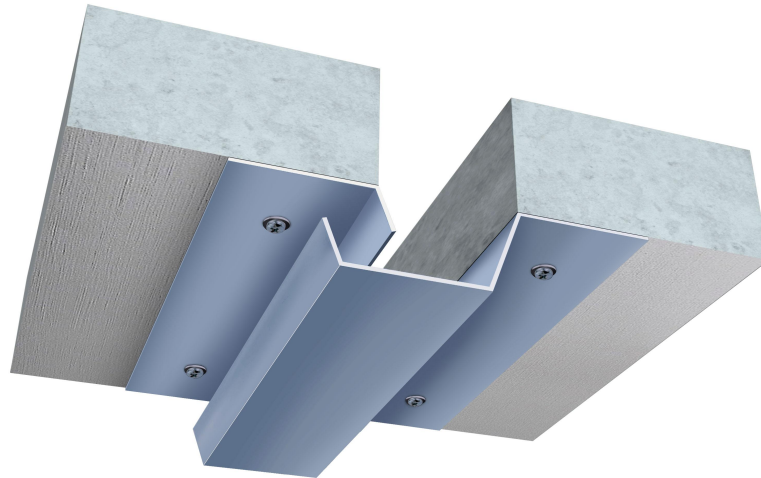

WP
Series

Seismic
Movement

Under-Slab
Use

Water

Details

Usage : Under-Slab

Joint Width (mm) : 50 - 200

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
		Millimeter			Horizontal	Vertical	Shear	
Straight /Corner	WPS 050	50	50	200	50	*	Excellent	*
	WPS 075	75	50	225	50	*	Excellent	*
	WPS 100	100	50	250	50	*	Excellent	*
	WPS 125	125	50	275	50	*	Excellent	*
	WPS 150	150	50	300	50	*	Excellent	*
	WPS 175	175	50	332	50	*	Excellent	*
	WPS 200	200	50	370	50	*	Excellent	*