


Features

- System designed for indoor/outdoor application
- Double component nosing
- Heavy nosing design and in-situ installation makes this product most desirable for heavy duty applications
- Mixture of carborundum chips and epoxy is filled in 10.5mm wide compartments for robust design and rapid response
- Suitable for heavy-duty pedestrian traffic

- In-situ installation designed for use with poured or precast concrete, terrazzo, steel pan cement filled stairs
- Easy installation
- 102mm tread area, 13mm riser area
- Standard profile length 3 meters (10')
- Factory cut option available
- Made of Construction grade aluminum alloy 6063-T6

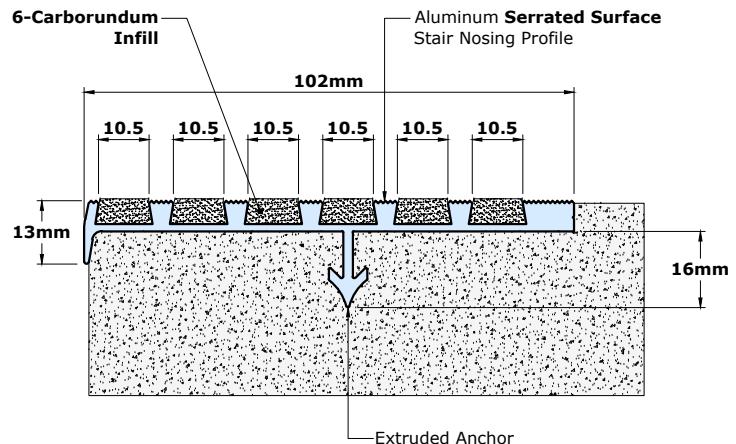

Color Options: _____



MILL FINISH

Special Note: Customer is encouraged to locally source anchors and construction grade external adhesive for fixing because the local conditions vary from country to country