

## Features


- System is designed to be installed in recessed floor
- Installation is recommended for up-to 10mm thick Ceramic Tiles/Marble/Granite/Wood or Carpet finishes
- Stainless steel central spring clips/flanges allow swift shift between positive and negative movements
- Firmly fixed Santoprene gasket idea for movement tractability without shearing or breaking

- Suitable for heavy pedestrian traffic and trolleys
- System suitable for minor seismic movements
- System allows minor shear movements
- No bump structure is ADA compliant
- Vapor and Fire Barriers are optionally available

### Straight Application BWS



BW Series

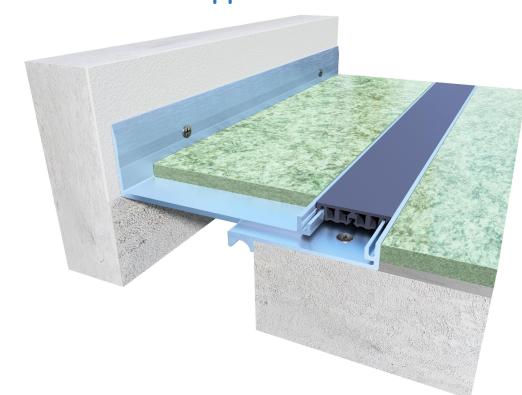



### Corner Application BWC

INT. Application

Thermal Movement

Floor Use

Wall Use

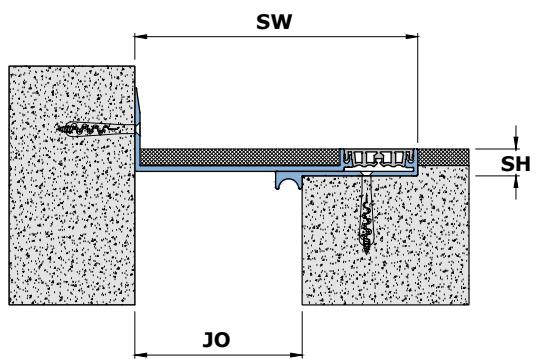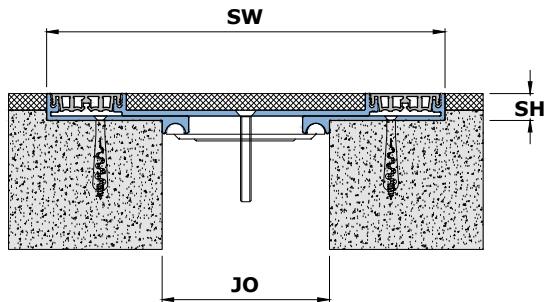

## Details

Usage : Internal Floor/Wall

Joint Width (mm) : 50 - 400

Optional : Vapor/Fire Barrier

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
					Millimeter			
Straight (S)	BWS 050	50	16	125	50	50	50	Minor 3
	BWS 100	100	16	229	50	50	50	Minor 2
	BWS 150	150	19	320	50	50	50	Minor 1
	BWS 200	200	19	390	50	50	50	Minor 1
	BWS 250	250	19	465	50	50	50	Minor 1
	BWS 300	300	19	540	50	50	50	Minor 1
	BWS 350	350	19	615	50	50	50	Minor 1
	BWS 400	400	19	690	50	50	50	Minor 1
Corner (C)	BWC 050	50	16	88	25	25	25	Minor 3
	BWC 100	100	16	169	25	25	25	Minor 2
	BWC 150	150	19	235	25	25	25	Minor 1
	BWC 200	200	19	295	25	25	25	Minor 1
	BWC 250	250	19	358	25	25	25	Minor 1
	BWC 300	300	19	420	25	25	25	Minor 1
	BWC 350	350	19	483	25	25	25	Minor 1
	BWC 400	400	19	545	25	25	25	Minor 1

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.