
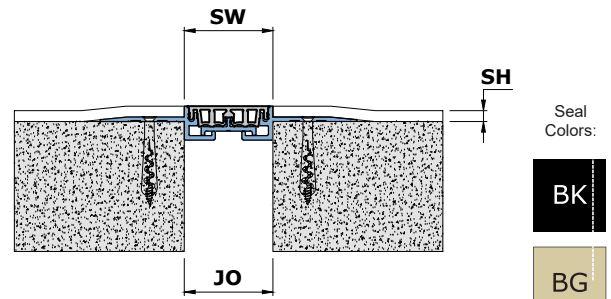




Features

- Surface mounted system designed for retrofit installation
- Installation is recommended for Carpet floor finishes
- Firmly fixed Santoprene gasket idea for movement tractability without shearing or breaking
- System is suitable for minor seismic movements
- Commonly used system that is easy to install and maintain
- System allows narrow shear movement
- Suitable for heavy pedestrian traffic and hand trolley loads
- Vapor and Fire Barriers are optionally available

Straight Application AFS

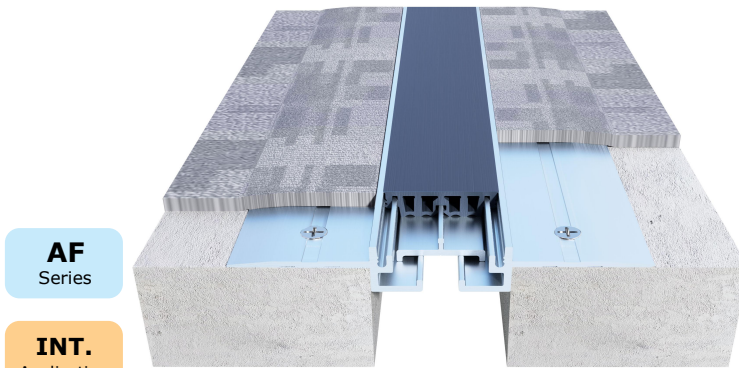

Corner Application AFC

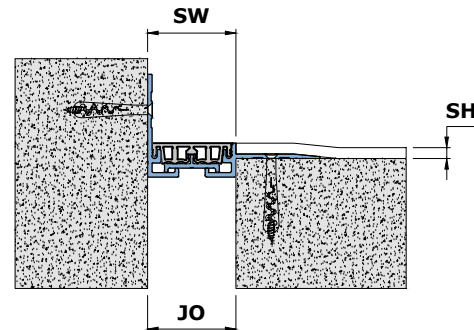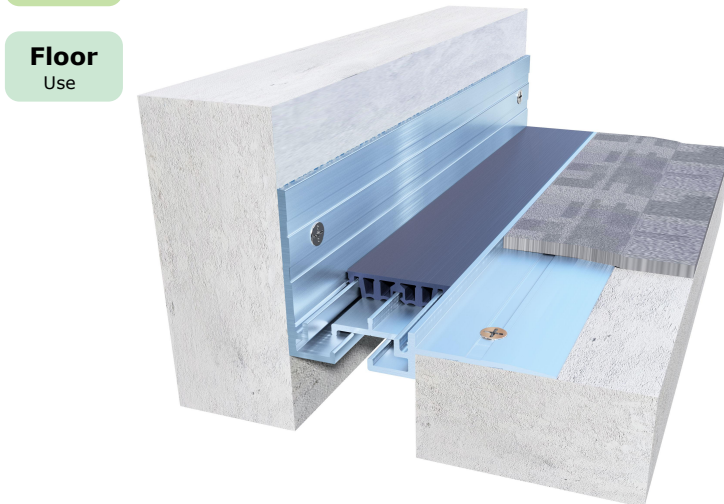

Details

Usage : Floor

Joint Width (mm) : 25 - 75

Optional : Vapor/Fire Barrier

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
		Millimeter			Horizontal	Vertical	Shear	
Straight (S)	AFS 025	25	6	25	25	25	Narrow	3
	AFS 050	50	6	51	25	25	Narrow	2
	AFS 075	75	6	76	25	25	Narrow	2
Corner (C)	AFC 025	25	6	25	25	25	Narrow	3
	AFC 050	50	6	51	25	25	Narrow	2
	AFC 075	75	6	76	25	25	Narrow	2