


Features

- Surface mounted system designed for retrofit installation
- Easy to install and maintain
- The steel central flanges allow swift shift between positive and negative movements
- Specially designed spring assembly under the central plate provides silent passage to pedestrians and wheels
- Carpet/PVC floor coverings to be built-joined with expansion joint frames for smooth movement over the system
- Load rated subject to joint opening
- System allows excellent shear movements
- System allows full seismic movements
- Vapor and Fire Barriers are optionally available

Straight Application DTS

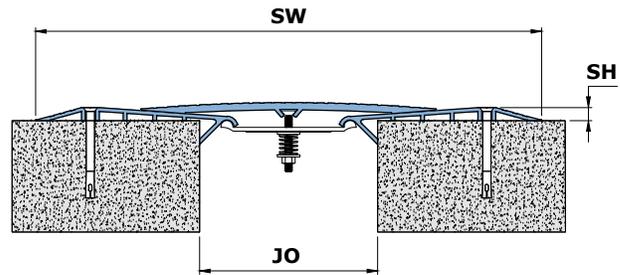

DT Series

EXT. Application


INT. Application

Seismic Movement

Floor Use

Wall Use

Corner Application DTC

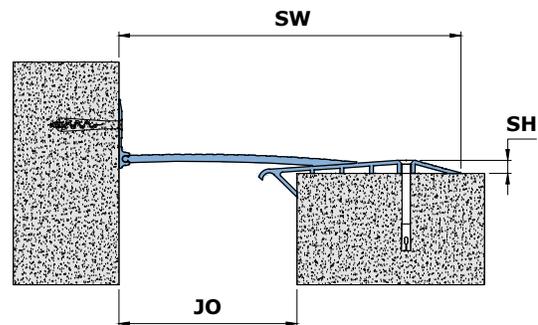

Details

Usage : Floor/Wall

Joint Width (mm) : 50 - 200

Optional : Vapor/Fire Barrier

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
					Millimeter		Horizontal	
Straight (S)	DTS 050	50	10	233	50	25	Excellent	9
	DTS 075	75	8	288	50	25	Excellent	9
	DTS 100	100	8	314	50	25	Excellent	9
	DTS 150	150	11	430	50	25	Excellent	6
	DTS 200	200	12	570	50	25	Excellent	6
Corner (C)	DTC 050	50	10	142	25	25	Excellent	9
	DTC 075	75	8	182	25	25	Excellent	9
	DTC 100	100	8	208	25	25	Excellent	9
	DTC 150	150	11	290	25	25	Excellent	6
	DTC 200	200	12	387	25	25	Excellent	6