


Features

- System designed for external/internal floor installation
- Santoprene/EPDM Seal for car parks and bridge decks
- Elastomeric concrete header designed to withstand heavy traffic
- UV stabilized
- Meets acoustics requirements range up to 72 STC
- Suitable for watertight applications
- System allows good seismic movements
- System allows excellent shear movements

Straight Application KCS

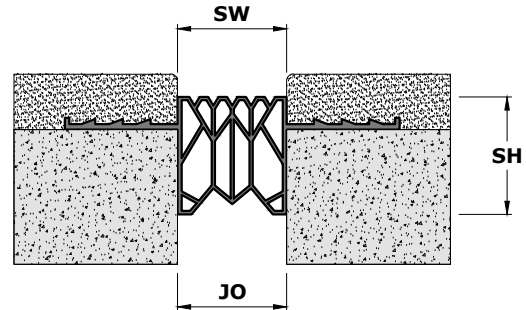

KC
Series


EXT.
Application

INT.
Application

Thermal
Movement

Floor
Use

Corner Application KCC

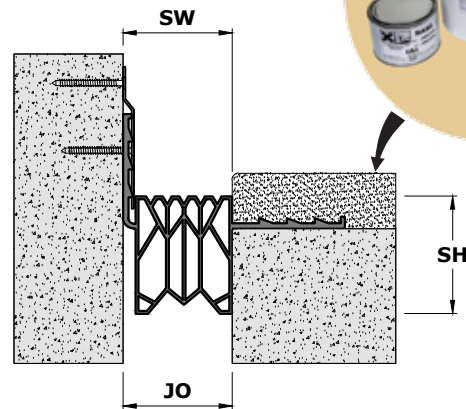

Details

Usage : Floor

Joint Width (mm) : 25 - 150

Optional : Fire Barrier

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
		Millimeter			Horizontal	Vertical	Shear	
Straight (S)	KCS 025	25	40	25	25	10	Excellent	5
	KCS 050	50	54	50	25	10	Excellent	5
	KCS 075	75	54	75	25	10	Excellent	5
	KCS 100	100	54	100	25	10	Excellent	5
	KCS 125	125	54	125	25	10	Excellent	5
	KCS 150	150	54	150	25	10	Excellent	5
Corner (C)	KCC 025	25	40	25	25	10	Excellent	5
	KCC 050	50	54	50	25	10	Excellent	5
	KCC 075	75	54	75	25	10	Excellent	5
	KCC 100	100	54	100	25	10	Excellent	5
	KCC 125	125	54	125	25	10	Excellent	5
	KCC 150	150	54	150	25	10	Excellent	5