


Features

- Surface mounted system ideal for retrofit
- Firmly fixed Santoprene gasket ideal for movement tractability without shearing or breaking
- Centering Bar system for wider gaps
- Extra large sizes available
- Commonly used system that is easy to install and maintain
- Suitable for external applications
- System is suitable for full seismic movements
- Fire Barriers are optionally available

Straight Application FTS

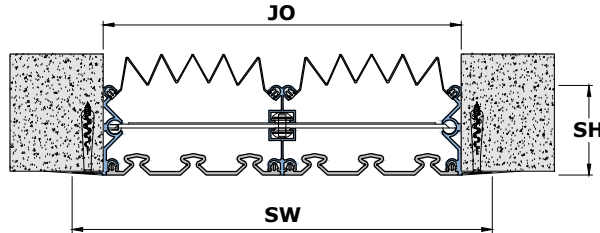

Powder Coat Finish:
Any RALColor




Seal
Colors:

Anodized
Finishes



Corner Application FTC

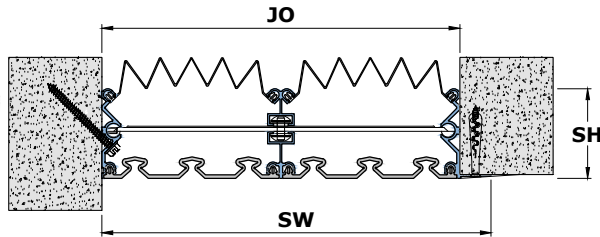

FT
Series

EXT.
Application

Seismic
Movement

Wall
Use

Details

Usage : Wall/Ceiling

Joint Width (mm) : 38 - 600

Optional : Fire Barrier

Wider Joint cover available at request

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
		Millimeter			Horizontal	Vertical	Shear	
Straight (S)	FTS 025	38	61	135	50	50	Excellent	*
	FTS 050	50	61	147	50	50	Excellent	*
	FTS 075	75	61	172	50	50	Excellent	*
	FTS 100	100	61	197	50	50	Excellent	*
	FTS 150	150	61	247	50	50	Excellent	*
	FTS 200	200	75	300	50	50	Excellent	*
	FTS 250	250	75	350	50	50	Excellent	*
	FTS 300	300	75	400	50	50	Excellent	*
	FTS 450	450	75	550	50	50	Excellent	*
	FTS 600	600	75	700	50	50	Excellent	*
Corner (C)	FTC 025	38	61	86	50	50	Excellent	*
	FTC 050	50	61	98	50	50	Excellent	*
	FTC 075	75	61	123	50	50	Excellent	*
	FTC 100	100	61	148	50	50	Excellent	*
	FTC 150	150	61	199	50	50	Excellent	*
	FTC 200	200	75	250	50	50	Excellent	*
	FTC 250	250	75	300	50	50	Excellent	*
	FTC 300	300	75	350	50	50	Excellent	*
	FTC 450	450	75	500	50	50	Excellent	*
	FTC 600	600	75	650	50	50	Excellent	*