
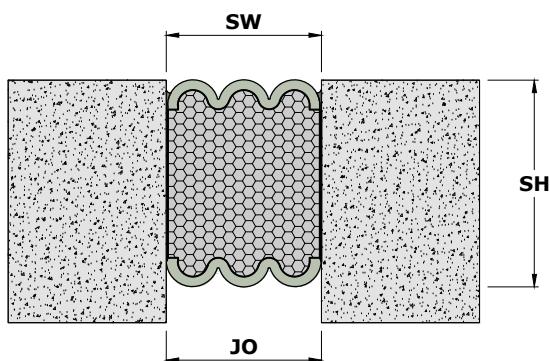


Features

- Available in 2 or 3 hour rating in accordance with UL2079 hose stream test and ASTM E1399, ASTM E1966 and ASTM E119
- Additional fire stopping systems like mineral wool, fire rated sealant and ceramic fire blanket are not required
- Also available in Pick-Resistance quality under system code ZAF-XXX-FR
- Supplied pre-compressed for easy installation
- The ZAF Series fire-rated system is designed to cover both sides of the joint opening
- Meets acoustic requirements range up to 72 STC
- High-temperature and UV stabilized
- All-in-one solution energy-efficient, watertight, sound-attenuating and trafficable

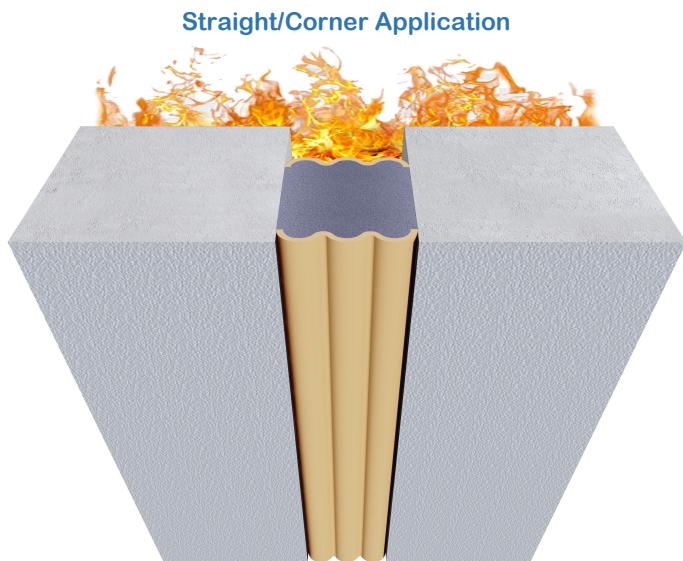

Details

Usage : Floor/Wall

Joint Width (mm) : 25-150

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
		Millimeter			Horizontal	Vertical	Shear	
Straight /Corner	ZAF 025	25	100	25	50	50	Excellent	*
	ZAF 050	50	100	50	50	50	Excellent	*
	ZAF 075	75	100	75	50	50	Excellent	*
	ZAF 100	100	100	100	50	50	Excellent	*
	ZAF 125	125	100	125	50	50	Excellent	*
	ZAF 150	150	100	150	50	50	Excellent	*

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.