



Features

- System designed for surface mount installation
- Construction grade sand-blasted aluminum cover
- Compression seal convenient, durable, waterproof expansion joint
- System allows full seismic movements
- System allows excellent shear movements
- Load rated for heavy vehicular traffic
- Fire Barrier is optionally available

Straight Application GHS

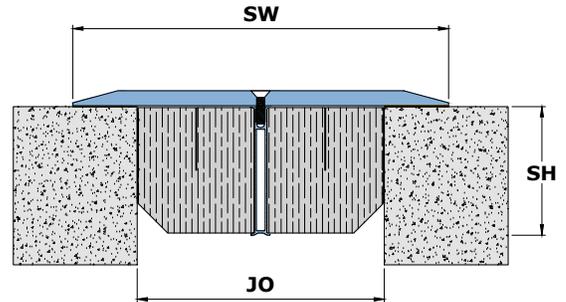

Corner Application GHC

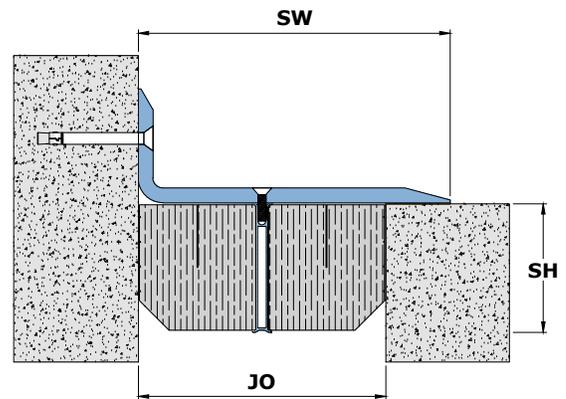

- GH Series
- EXT. Application
- INT. Application
- Seismic Movement
- Floor Use

Details

Usage : Floor

Joint Width (mm) : 250 - 650

Optional : Fire Barrier

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
					Millimeter		Horizontal	
Straight (S)	GHS 250	250	131	385	50	25	Excellent	Vehicular
	GHS 300	300	131	460	50	25	Excellent	
	GHS 350	350	131	535	50	25	Excellent	
	GHS 400	400	131	610	50	25	Excellent	
	GHS 450	450	131	685	50	25	Excellent	
	GHS 500	500	131	760	50	25	Excellent	
	GHS 550	550	131	835	50	25	Excellent	
	GHS 600	600	131	910	50	25	Excellent	
	GHS 650	650	131	985	50	25	Excellent	
Corner (C)	GHC 250	250	131	318	25	*	Excellent	Vehicular
	GHC 300	300	131	380	25	*	Excellent	
	GHC 350	350	131	443	25	*	Excellent	
	GHC 400	400	131	505	25	*	Excellent	
	GHC 450	450	131	568	25	*	Excellent	
	GHC 500	500	131	630	25	*	Excellent	
	GHC 550	550	131	693	25	*	Excellent	
	GHC 600	600	131	755	25	*	Excellent	
	GHC 650	650	131	818	25	*	Excellent	

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.