


Features

- System designed for external floor/wall applications
- Waterproof/Watertight
- Excellent for seamless installation in curves and radius
- UV stabilized and trafficable/traffic-durable
- For excellent result, choose from 26 color options
- Meets acoustic requirements range up to 72 STC
- Suitable for interior/exterior applications
- Supplied pre-compressed for easy installation
- System allows excellent shear movements
- System allows full seismic movements

Straight/Corner Application

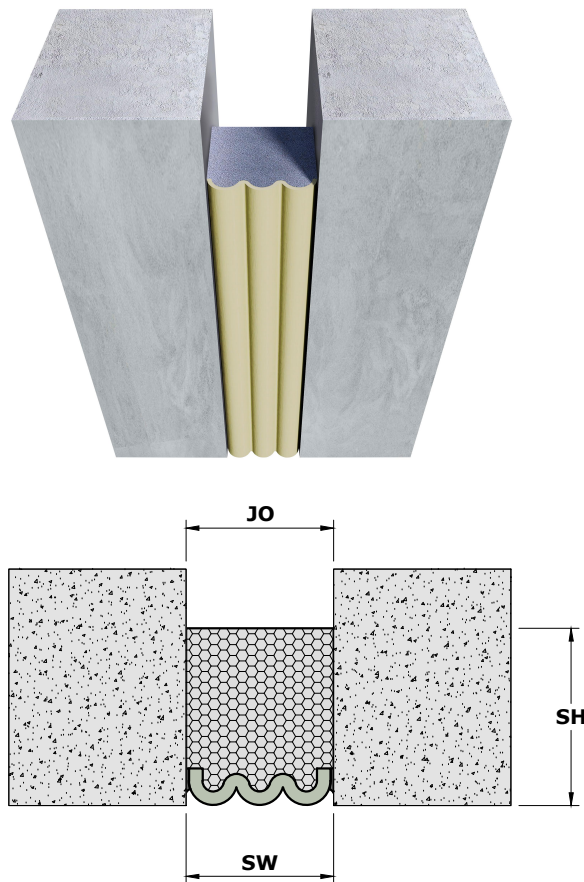

IB
Series

EXT.
Application

INT.
Application

Seismic
Movement

Floor
Use

Wall
Use

Details

Usage : Floor/Wall

Joint Width (mm) : 25 - 200

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
		Millimeter			Horizontal	Vertical	Shear	
Straight (S)	IBX 025	25	45	25	50	50	Excellent	*
	IBX 050	50	65	50	50	50	Excellent	*
	IBX 075	75	90	75	50	50	Excellent	*
	IBX 100	100	115	100	50	50	Excellent	*
	IBX 125	125	140	125	50	50	Excellent	*
	IBX 150	150	150	150	50	50	Excellent	*
	IBX 175	175	175	175	50	50	Excellent	*
	IBX 200	200	200	200	50	50	Excellent	*