


## Features

- System designed for external floor/wall applications
- Waterproof/Watertight
- Excellent for seamless installation in curves and radius
- UV stabilized
- Safe for potable water
- System allows excellent shear movements
- System allows full seismic movements
- Suitable for interior/exterior applications

### Straight/Corner Application

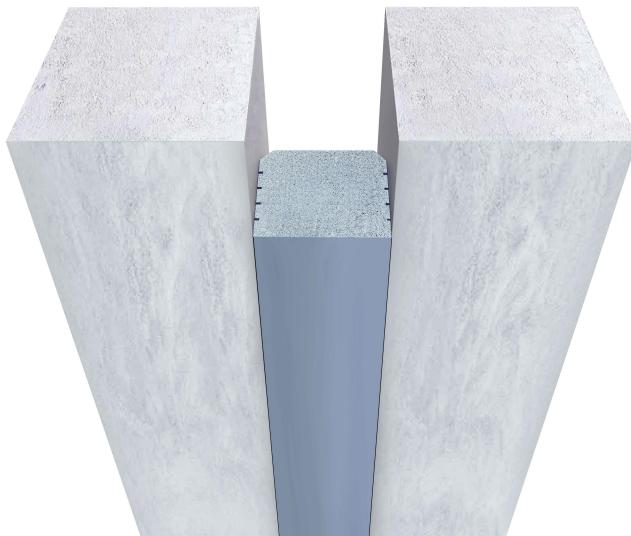

**IA**  
Series


**EXT.**  
Application

**INT.**  
Application

**Seismic**  
Movement

**Floor**  
Use

**Wall**  
Use

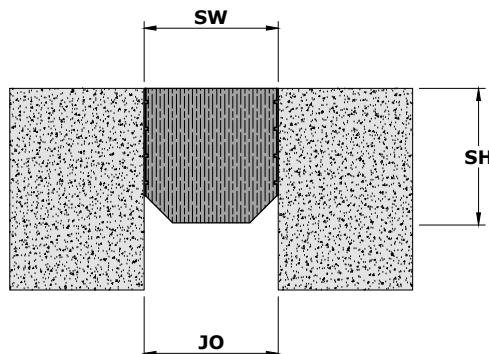

## Details

Usage : Floor/Wall

Joint Width (mm) : 25 - 200

Optional : Fire Barrier

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
		Millimeter			Horizontal	Vertical	Shear	
Straight (S) /Corner (C)	IAX 025	25	50	25	50	50	Excellent	*
	IAX 050	50	50	50	50	50	Excellent	*
	IAX 075	75	75	75	50	50	Excellent	*
	IAX 100	100	90	100	50	50	Excellent	*
	IAX 125	125	100	125	50	50	Excellent	*
	IAX 150	150	100	150	50	50	Excellent	*
	IAX 175	175	100	175	50	50	Excellent	*
	IAX 200	200	130	200	50	50	Excellent	*

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.