
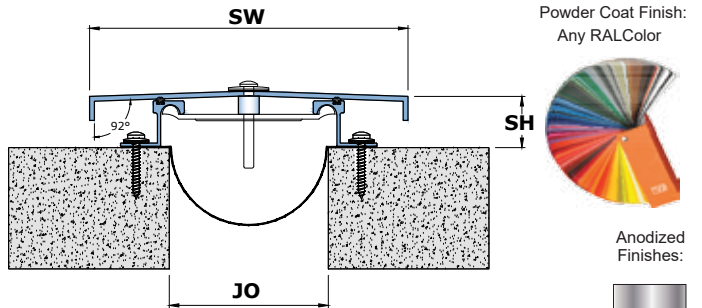


Features

- System is designed for surface mount installation
- The central plate allows swift between positive and negative movements
- For an excellent result, choose to powder coat the cover plate to match the neighboring wall finish
- Factory formed transitions available
- System allows excellent shear movements
- System allows full seismic movements
- The Vapor Barrier is standard with this system

Straight Application DBS

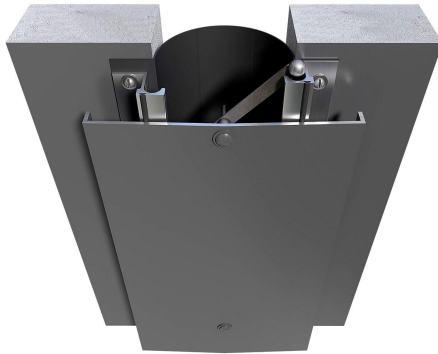

DB
Series


EXT.
Application

Seismic
Movement

Wall
Use

Roof
Use

Corner Application DBC

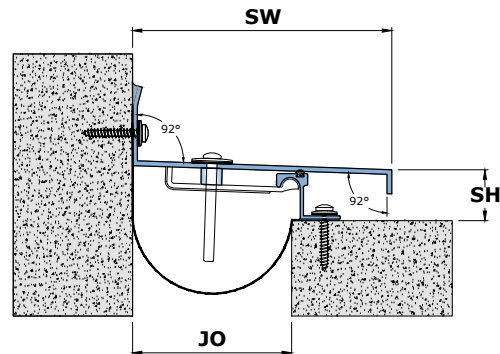

Details

Usage : Wall/Roof

Joint Width (mm) : 50 - 300

Optional : Fire Barrier

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
		Millimeter			Horizontal	Vertical	Shear	
Straight (S)	DBS 050	50	33	125	50	50	Excellent	*
	DBS 075	75	32	175	50	50	Excellent	*
	DBS 100	100	32	200	50	50	Excellent	*
	DBS 150	150	32	250	50	50	Excellent	*
	DBS 200	200	32	325	50	50	Excellent	*
	DBS 300	300	31	475	50	50	Excellent	*
Corner (C)	DBC 050	50	33	88	25	25	Excellent	*
	DBC 075	75	32	126	25	25	Excellent	*
	DBC 100	100	32	163	25	25	Excellent	*
	DBC 150	150	31	238	25	25	Excellent	*
	DBC 200	200	30	313	25	25	Excellent	*
	DBC 300	300	29	463	25	25	Excellent	*