
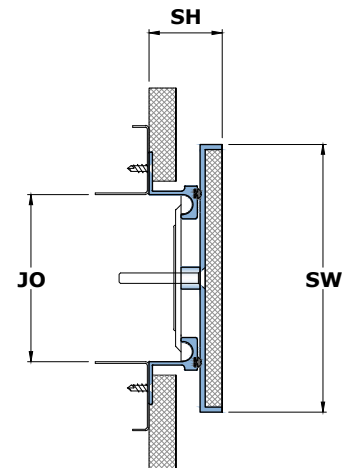




Features

- System is designed for gypsum drywall/curtain wall
- The central plate allows swift shift between positive and negative movements
- Suitable for interior applications
- System allows excellent shear movements
- System allows full seismic movements
- Vapor and Fire Barriers are optionally available

Straight Application DGS

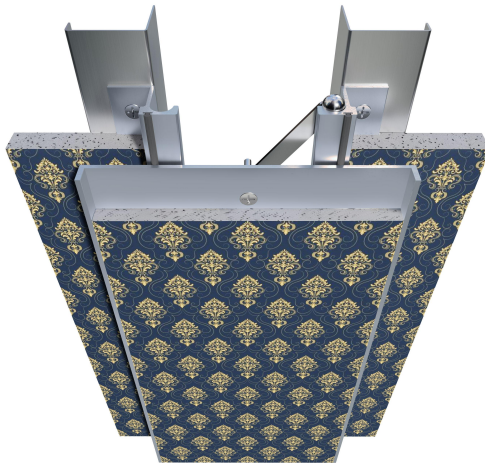

Corner Application DGC

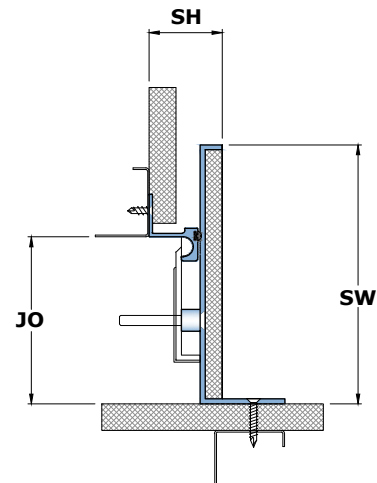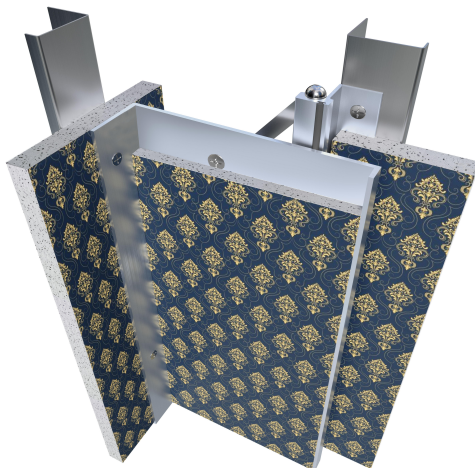

DG
Series

INT.
Application

Seismic
Movement

Wall
Use

Details

Usage : Wall/Ceiling

Joint Width (mm) : 100 - 300

Optional : Vapor/Fire Barrier

Wider Joint cover available at request

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
		Millimeter			Horizontal	Vertical	Shear	
Straight (S)	DGS 100	100	43	160	50	25	Excellent	*
	DGS 150	150	43	235	50	25	Excellent	*
	DGS 200	200	43	310	50	25	Excellent	*
	DGS 250	250	43	385	50	25	Excellent	*
	DGS 300	300	43	460	50	25	Excellent	*
Corner (C)	DGC 100	100	43	155	25	25	Excellent	*
	DGC 150	150	43	230	25	25	Excellent	*
	DGC 200	200	43	305	25	25	Excellent	*
	DGC 250	250	43	380	25	25	Excellent	*
	DGC 300	300	43	455	25	25	Excellent	*