


Features

- System is designed for surface mounted external /internal floor installation
- Santoprene/EPDM Seal for car parks and bridge decks
- Construction grade aluminum side frames
- Suitable for watertight applications
- UV stabilized
- Does not require any cut out or floor modifications for installation
- System allows excellent shear movements
- System allows good seismic movements
- Heavy duty applications

Straight Application KES

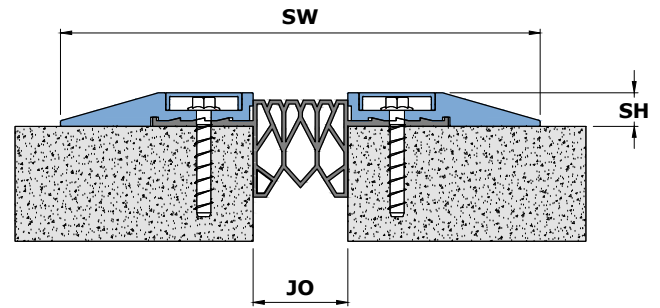

KE
Series


EXT.
Application

INT.
Application

Thermal
Movement

Floor
Use

Straight Application KEC

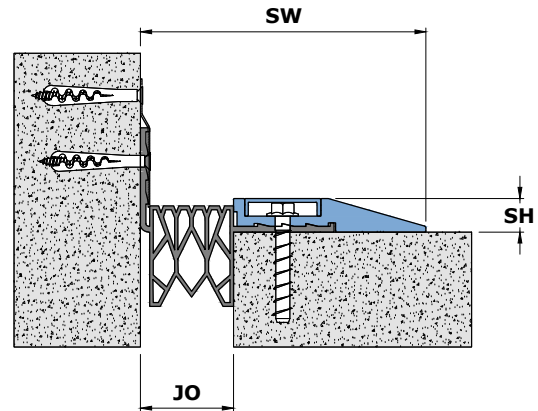

Details

Usage : Floor

Joint Width (mm) : 25 - 100

Optional : Fire Barrier

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
		Millimeter			Horizontal	Vertical	Shear	
Straight (S)	KES 025	25	18	233	50	15	Excellent	5
	KES 050	50	18	258	50	15	Excellent	5
	KES 075	75	18	283	50	15	Excellent	5
	KES 100	100	18	308	50	15	Excellent	5
Corner (C)	KEC 025	25	18	129	50	15	Excellent	5
	KEC 050	50	18	154	50	15	Excellent	5
	KEC 075	75	18	179	50	15	Excellent	5
	KEC 100	100	18	204	50	15	Excellent	5