


Features

- System is designed to relieve stress induced by small expansion & contraction movements as the result of absorption and expulsion of moisture in concrete.
- Commonly used for easy installation
- Control joint is used to control cracking and structural movements
- Made in stainless steel with color options: Brass, Bronze, Mirror Finish, Steel Mill finish

Straight Application

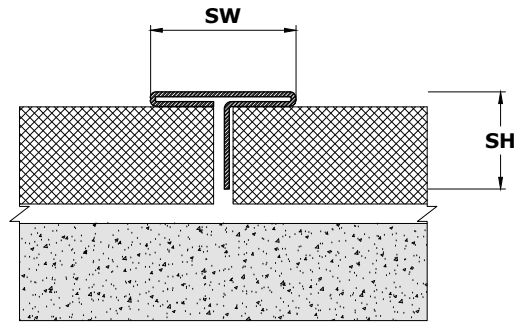

- XJ**
Series
- INT.**
Application
- EXT.**
Application
- Thermal**
Movement
- Wall**
Use

Details

Usage : Wall

Sight Width (mm) : 8 - 20

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
		Millimeter			Horizontal	Vertical	Shear	
Straight (S)	XJ0805	*	5	8	*	*	*	*
	XJ1010	*	10	10	*	*	*	*
	XJ1510	*	10	15	*	*	*	*
	XJ2010	*	10	20	*	*	*	*