

Features

- Surface mounted system designed for retrofit installation
- Installation is recommended over finishes
- Firmly fixed Santoprene gasket idea for movement tractability without shearing or breaking
- System is suitable for minor seismic movements
- Commonly used system that is easy to install and maintain
- Allows narrow shear movement
- Suitable for heavy pedestrian traffic and hand trolley loads
- Vapor and Fire Barriers are optionally available

Straight Application ADS

AD
Series

EXT.
Application


INT.
Application

Thermal
Movement

Floor
Use

Wall
Use

Ceiling
Use

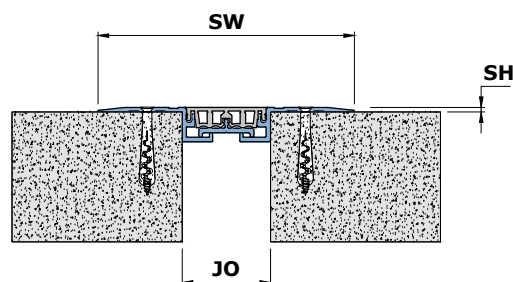

Seal
Colors:


BK

BG

WH

GY

Corner Application ADC

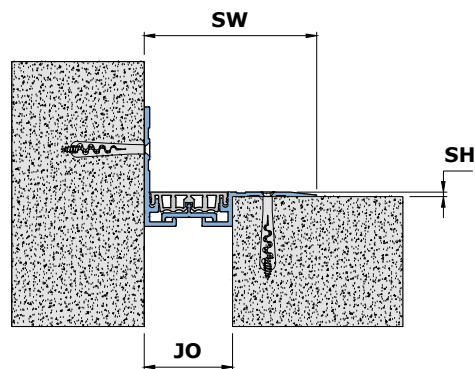

Details

Usage : Floor/Wall/Ceiling

Joint Width (mm) : 25 - 75

Optional : Vapor/Fire Barrier

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
		Millimeter			Horizontal	Vertical	Shear	
Straight (S)	ADS 025	25	2.5	120	25	25	Narrow	3
	ADS 050	50	2.5	145	25	25	Narrow	2
	ADS 075	75	2.5	170	25	25	Narrow	2
Corner (C)	ADC 025	25	2.5	73	25	25	Narrow	3
	ADC 050	50	2.5	97	25	25	Narrow	2
	ADC 075	75	2.5	122	25	25	Narrow	2