

Features

- System designed for gypsum drywall/curtain wall
- Central plate allows swift between positive and negative movements
- For excellent result, choose to powder coat the cover plate to match neighboring wall finish

- Suitable for interior/exterior applications
- System allows excellent shear movements
- System allows full seismic movements
- Vapor and Fire Barriers are optionally available

Straight Application DMS



DM Series

EXT. Application

INT. Application

Seismic Movement

Wall Use

Ceiling Use

Roof Use

Corner Application DMC





Details

Usage : Wall/Ceiling/Roof

Joint Width (mm) : 50 - 300

Optional : Vapor/Fire Barrier

Wider Joint cover available at request

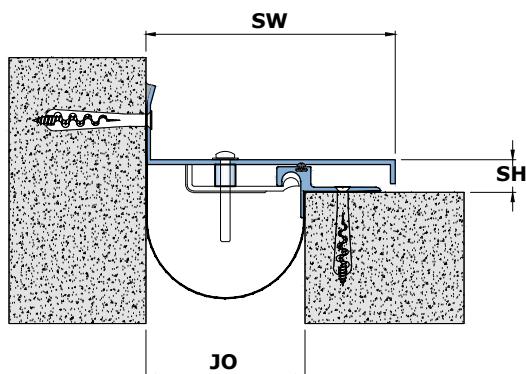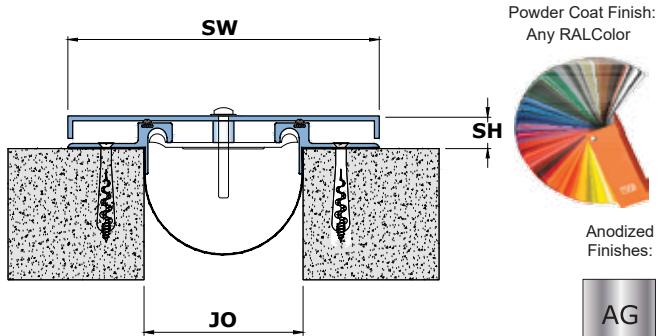

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
		Millimeter		Horizontal	Vertical	Shear		
Straight (S)	DMS 050	50	20	102	50	25	Excellent	*
	DMS 075	75	20	140	50	25	Excellent	*
	DMS 100	100	20	196	50	25	Excellent	*
	DMS 150	150	20	246	50	25	Excellent	*
	DMS 200	200	20	315	50	25	Excellent	*
	DMS 300	300	20	463	50	25	Excellent	*
Corner (C)	DMC 050	50	20	99	25	25	Excellent	*
	DMC 075	75	20	123	25	25	Excellent	*
	DMC 100	100	20	157	25	25	Excellent	*
	DMC 150	150	20	232	25	25	Excellent	*
	DMC 200	200	20	307	25	25	Excellent	*
	DMC 300	300	20	457	25	25	Excellent	*

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.