'TT' Series - Construction Joint Systems

Features

- System designed to be used for screed rail, concrete slab forming work, and concrete paving.
- Environmentally friendly alternative to steel and timber formwork
- Available in Aluminum profile
- Designed for pours of 100-225mm thick concrete (When used in conjunction with extension riser strip)
- Pre-drilled holes in vertical face for dowel bars and Perforated base for anchoring with mortar
- Top strip can be removed once concrete is set to allow joint sealing


TT Series


INT. Application

EXT. Application

Floor Use

Straight Application (Aluminum)

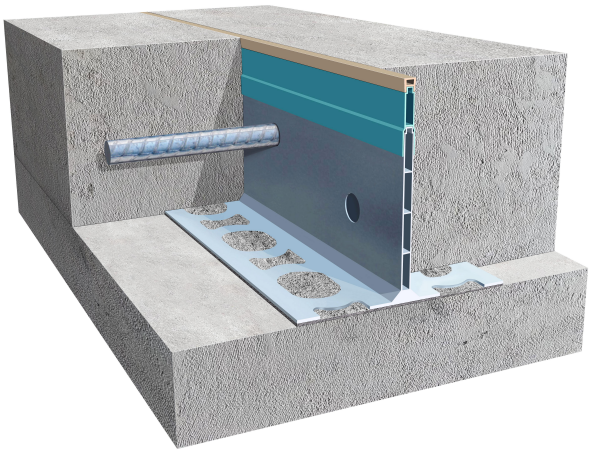

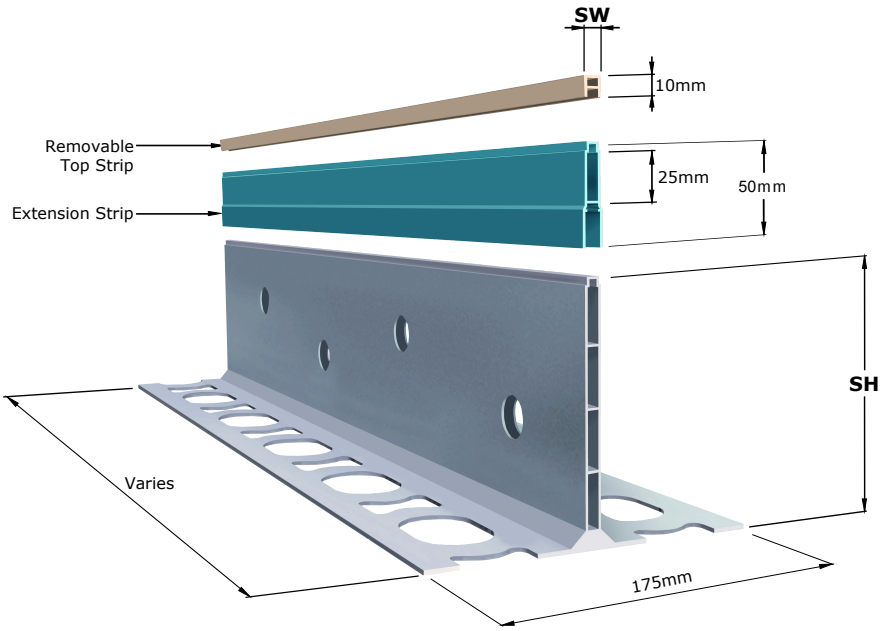

Details

Usage : Floor

System Height (mm) : 75 -150

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
		Millimeter			Horizontal	Vertical	Shear	
Straight (S)	TTX 075	*	75	10	*	*	*	*
	TTX 150	*	150	10	*	*	*	*

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.