



Features

- System designed to be installed in floor/wall recess
- Central plate of construction grade aluminum accommodate various floor finishes
- Steel central flanges allows swift shift between positive and negative movements
- System allows full seismic movements
- System allows excellent shear movements
- Load rated subject to joint opening
- Vapor and Fire Barriers are optionally available

Straight Application GAS

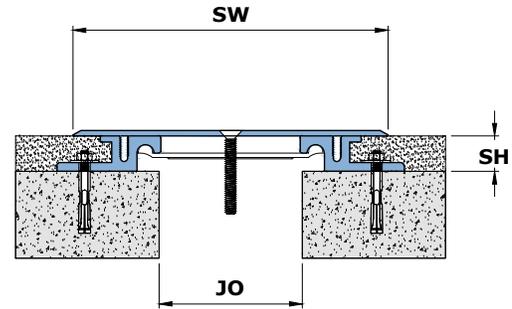

Corner Application GAC

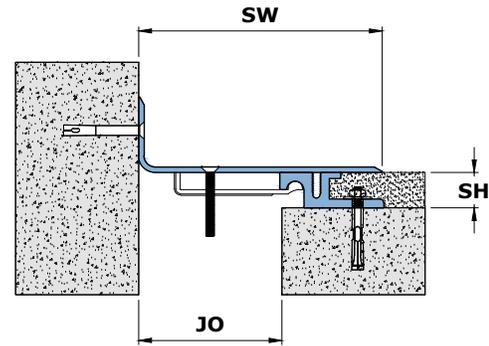

- GA Series
- EXT. Application
- INT. Application
- Seismic Movement
- Floor Use
- Wall Use

Details

Usage : Floor/Wall

Joint Width (mm) : 50 - 300

Optional : Vapor/Fire Barrier

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
		Millimeter			Horizontal	Vertical	Shear	
Straight (S)	GAS 050	50	25	125	50	50	Excellent	3
	GAS 075	75	25	185	50	50	Excellent	3
	GAS 100	100	25	220	50	50	Excellent	3
	GAS 150	150	25	300	50	50	Excellent	2
	GAS 200	200	25	375	50	50	Excellent	2
	GAS 250	250	25	460	50	50	Excellent	2
	GAS 300	300	25	500	50	50	Excellent	2
Corner (C)	GAC 050	50	25	88	25	13	Excellent	3
	GAC 075	75	25	130	25	13	Excellent	3
	GAC 100	100	25	160	25	13	Excellent	3
	GAC 150	150	25	225	25	13	Excellent	2
	GAC 200	200	25	388	25	13	Excellent	2
	GAC 250	250	25	355	25	13	Excellent	2
	GAC 300	300	25	425	25	13	Excellent	2