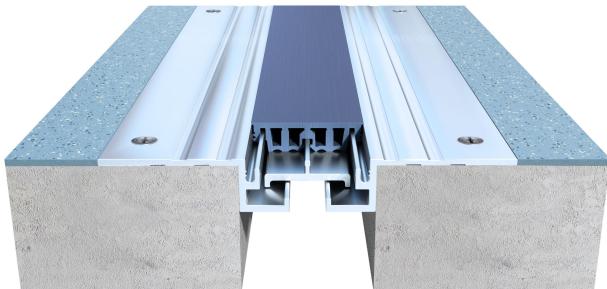


Features

- Surface mounted system designed for retrofit installation
- Installation is recommended for PVC/VCT/LVT/ Rubber floor finishes
- Firmly fixed Santoprene gasket idea for movement tractability without shearing or breaking
- System is suitable for minor seismic movements

- Commonly used system that is easy to install and maintain
- System allows narrow shear movement
- Suitable for heavy pedestrian traffic and hand trolley loads
- Vapor and Fire Barriers are optionally available

Straight Application ACS


AC
Series


EXT.
Application

INT.
Application

Thermal
Movement

Floor
Use


Wall
Use

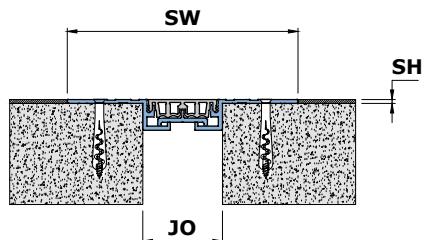Ceiling
Use


Seal Colors:

BK
BG
WH
GY

Corner Application ACC

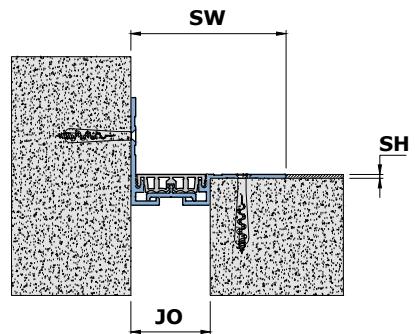

Details

Usage : Floor/Wall/Ceiling

Joint Width (mm) : 25 - 75

Optional : Vapor/Fire Barrier

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
		Millimeter			Horizontal	Vertical	Shear	
Straight (S)	ACS 025	25	3	121	25	25	Narrow	3
	ACS 050	50	3	145	25	25	Narrow	2
	ACS 075	75	3	152	25	25	Narrow	2
Corner (C)	ACC 025	25	3	73	25	25	Narrow	3
	ACC 050	50	3	98	25	25	Narrow	2
	ACC 075	75	3	114	25	25	Narrow	2

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.