


## Features

- System is designed for installation in concrete recess
- Firmly fixed Santoprene gasket idea for movement tractability without shearing or breaking
- System suitable for minor seismic movements
- System allows narrow shear movements
- Commonly used system that is easy to install and maintain
- Brass/Stainless Steel decorative caps are optionally available
- Vapor and Fire Barriers are optionally available

**Straight Application ABS**

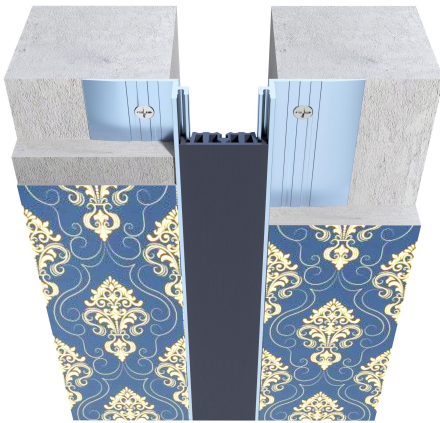


**AB**  
Series

**INT.**  
Application

**Thermal**  
Movement

**Floor**  
Use

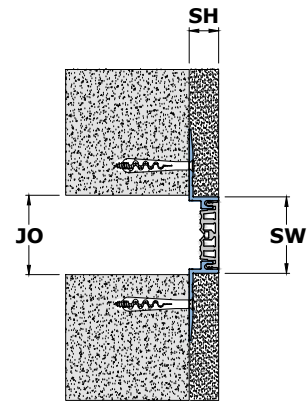

Seal  
Colors:



BK

BG

WH

GY

**Corner Application ABC**

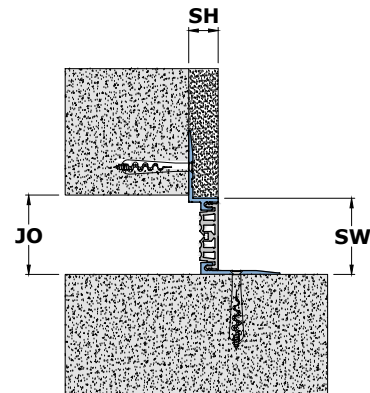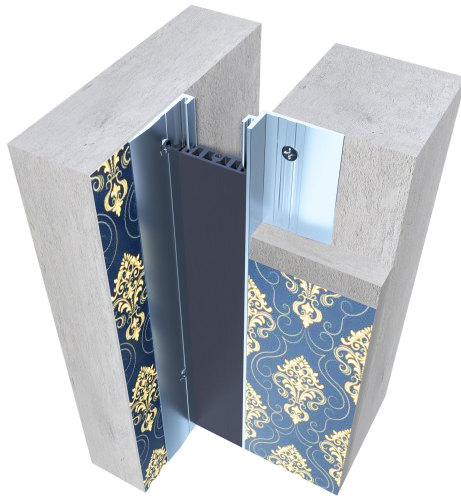

## Details

Usage : Wall

Joint Width (mm) : 25 - 75

Optional : Vapor/Fire Barrier  
Brass/SS Caps

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
		Millimeter			Horizontal	Vertical	Shear	
Straight (S)	ABS 025	25	19	25	25	25	Narrow	*
	ABS 050	50	19	48	25	25	Narrow	*
	ABS 075	75	19	73	25	25	Narrow	*
Corner (C)	ABC 025	25	19	25	25	25	Narrow	*
	ABC 050	50	19	48	25	25	Narrow	*
	ABC 075	75	19	73	25	25	Narrow	*