
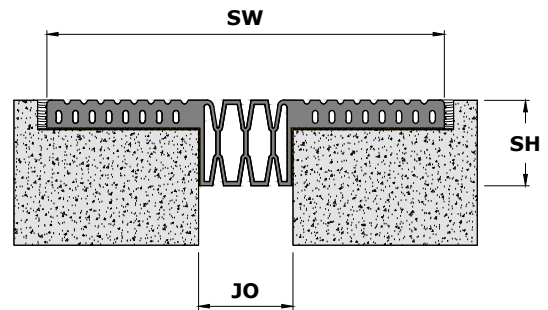


Features

- System is designed for external/internal floor installation
- Waterproof/Watertight
- Santoprene/Neoprene/EPDM Seal for parking decks
- Provides excellent impermeability
- Excellent for seamless installation in curves and radius
- For smooth vehicular/pedestrian movements, install leveled to floor
- System allows full seismic movements
- System allows excellent shear movements
- UV stabilized

Straight Application KFS

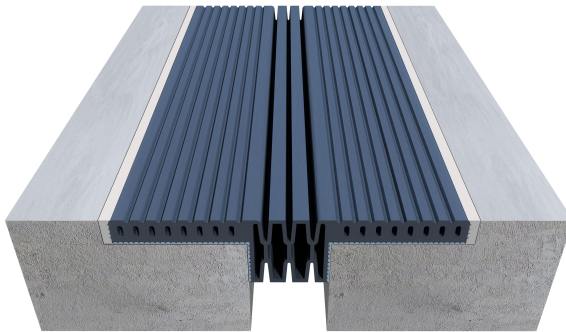

KF
Series



EXT.
Application

INT.
Application

Thermal
Movement

Floor
Use

Corner Application KFC

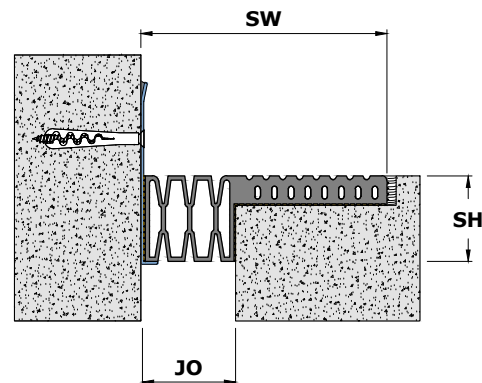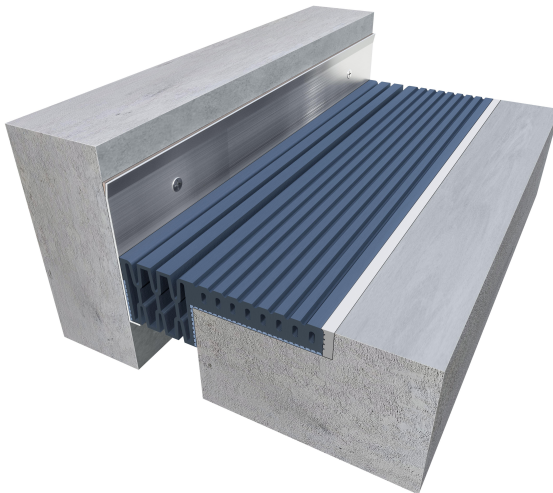

Details

Usage : Floor

Joint Width (mm) : 25 - 100

Optional : Fire Barrier

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
		Millimeter			Horizontal	Vertical	Shear	
Straight (S)	KFS 025	25	50	192	50	50	Excellent	*
	KFS 050	50	50	218	50	50	Excellent	*
	KFS 075	75	50	243	50	50	Excellent	*
	KFS 100	100	50	268	50	50	Excellent	*
Corner (C)	KFC 025	25	50	109	50	50	Excellent	*
	KFC 050	50	50	134	50	50	Excellent	*
	KFC 075	75	50	160	50	50	Excellent	*
	KFC 100	100	50	185	50	50	Excellent	*