
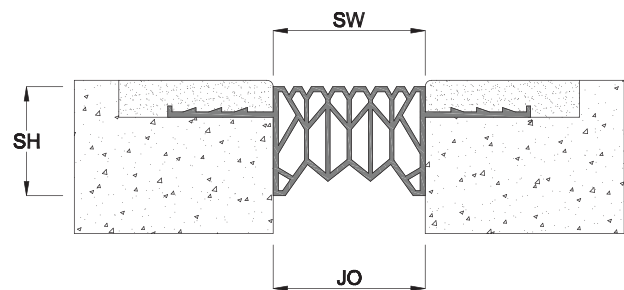


## Features

- System designed for external / internal floors
- Santoprene/Neoprene Seal for car parks and bridge decks
- Elastomeric Concrete header designed to withstand heavy traffic
- Suitable for watertight applications
- System allows excellent shear movements
- Meets acoustic requirements range up to 72 STC
- UV stabilized
- System allows good seismic movements

### Straight Application KCS

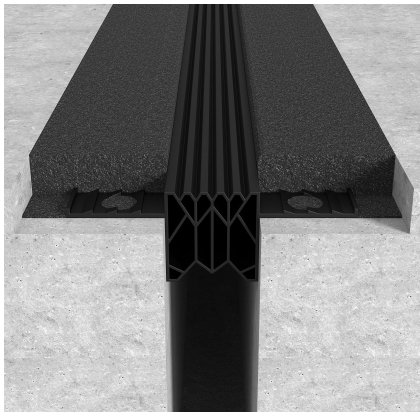

KC Series



EXT. Application

INT. Application

Thermal Movement

FLOOR USE

### Corner Application KCC

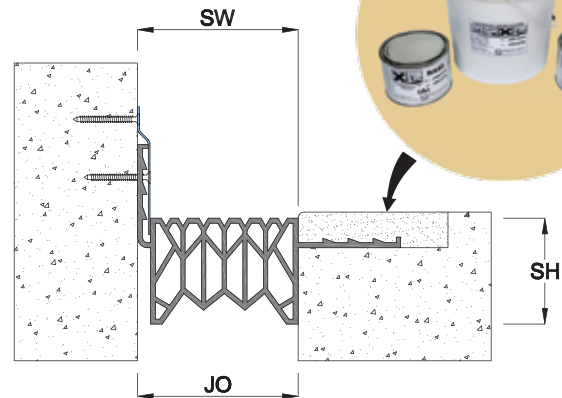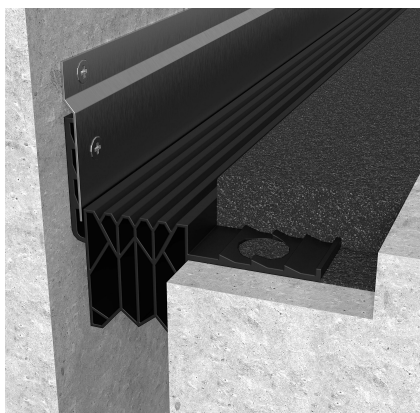

## Details

Usage : Floor

Joint width (mm) : 25 - 150

Optional : Fire Barrier

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
					Millimeter			
					Horizontal	Vertical	Shear	
Straight (S)	KCS 025	25	40	25	25	10	Excellent	5
	KCS 050	50	54	51	25	10	Excellent	5
	KCS 075	75	54	76	25	10	Excellent	5
	KCS 100	100	54	102	25	10	Excellent	5
	KCS 125	125	54	127	25	10	Excellent	5
	KCS 150	150	54	152	25	10	Excellent	5
Corner (C)	KCC 025	25	40	25	25	10	Excellent	5
	KCC 050	50	54	51	25	10	Excellent	5
	KCC 075	75	54	76	25	10	Excellent	5
	KCC 100	100	54	102	25	10	Excellent	5
	KCC 125	125	54	127	25	10	Excellent	5
	KCC 150	150	54	152	25	10	Excellent	5