


Features

- System designed for external/internal floor installation
- Neoprene/EPDM Seal for car parks and bridge decks
- Provides excellent impermeability
- Excellent for seamless installation in curves and radius
- UV stabilized
- System designed for easy installation using vacuum pump
- Use epoxy adhesive for secure installation
- Install on concrete upstand for leveled installation
- System allows excellent shear movements

Straight/Corner Application

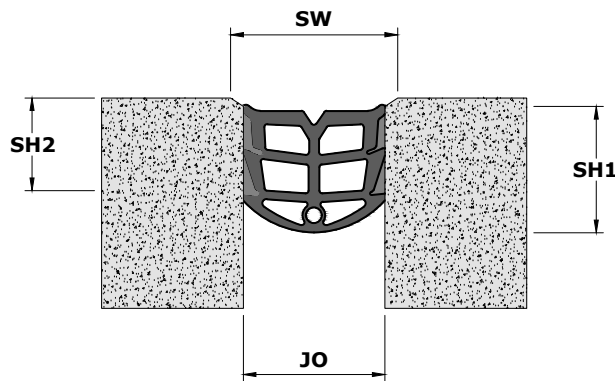

- KD**
Series
- EXT.**
Application
- INT.**
Application
- Thermal**
Movement
- Floor**
Use

Details

Usage : Floor

Joint Width (mm) : 10 - 100

Optional : Fire Barrier
(from 25mm - 100mm)

Application	Code	JO	SW	SH1	SH2	± Movement (%)		Load (Ton)
		Millimeter				Horizontal	Vertical	
Straight/ Corner	KDX 010	10	16	16	19	50	50	*
	KDX 015	15	18	16	19	50	50	*
	KDX 020	20	25	20	23	50	50	*
	KDX 025	25	34	30	33	50	50	*
	KDX 030	30	42	30	33	50	50	*
	KDX 050	50	63	45	48	50	50	*
	KDX 075	75	83	60	63	50	50	*
	KDX 100	100	115	85	88	50	50	*