
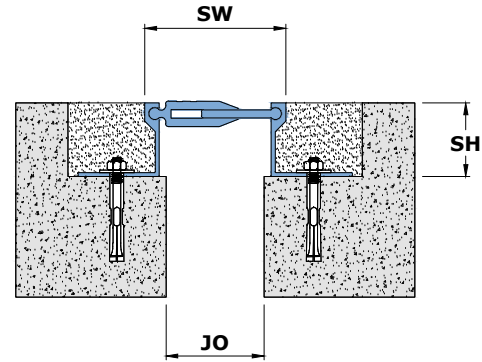


Features



- System is designed to be installed in floor recess
- System allows excellent shear movements
- System allows minor seismic movements
- Designed for pneumatic and solid tires
- Ideal for vehicular traffic depending upon gap width
- Vapor and Fire Barriers are optionally available

Straight Application MAS

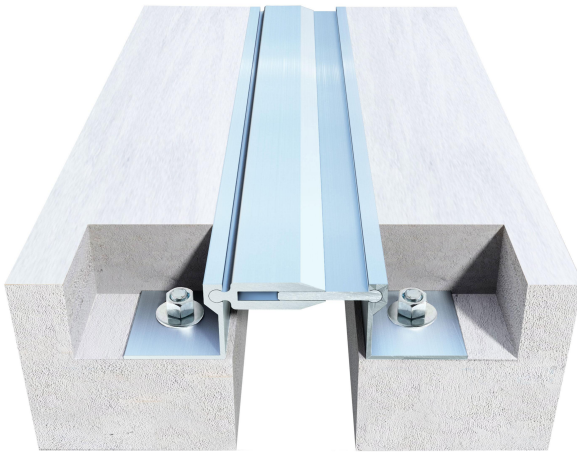

MA Series
EXT. Application

Corner Application MAC

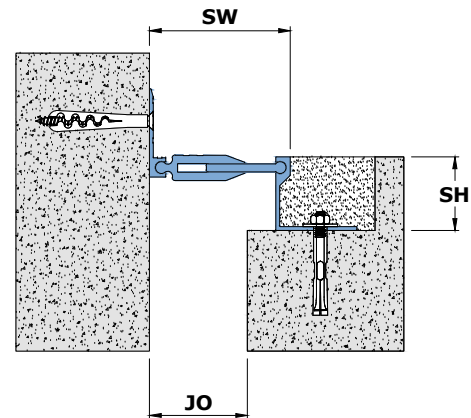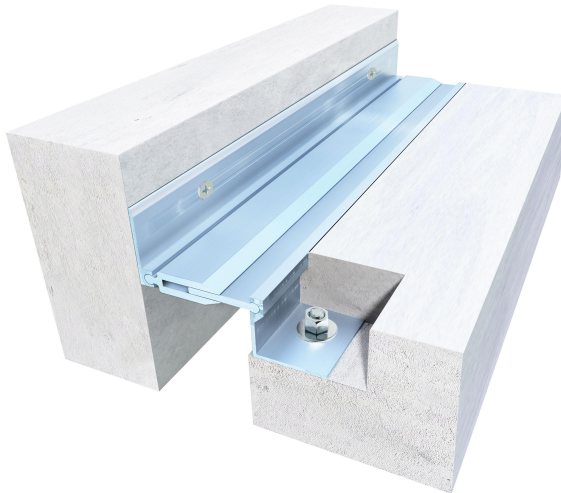

INT. Application
Seismic Movement
Floor Use

Details

Usage : Floor

Joint Width (mm) : 25 - 100

Optional : Vapor/Fire Barrier

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
					Millimeter			
					Horizontal	Vertical	Shear	
Straight (S)	MAS 025	25	38	43	25	25	Excellent	3.5
	MAS 040	40	38	58	25	25	Excellent	3.5
	MAS 050	50	38	72	25	25	Excellent	3.5
	MAS 075	75	38	98	25	25	Excellent	3.5
	MAS 100	100	38	127	25	25	Excellent	3.5
Corner (C)	MAC 025	25	38	44	25	25	Excellent	3.5
	MAC 040	40	38	59	25	25	Excellent	3.5
	MAC 050	50	38	72	25	25	Excellent	3.5
	MAC 075	75	38	98	25	25	Excellent	3.5
	MAC 100	100	38	127	25	25	Excellent	3.5