



Features

- System designed for external surface mount
- Waterproof/Watertight
- EPDM Seal profile for watertight application
- System allows full seismic movements
- Suitable for external application
- The Fire Barrier is optionally available with system

Straight/Corner Application

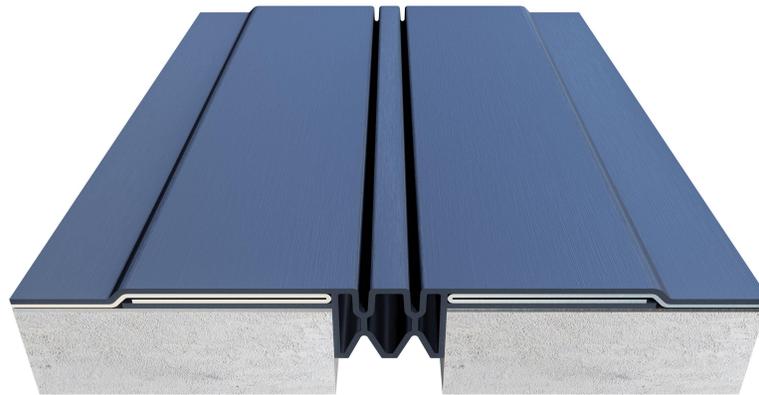

- KJ**
Series
- EXT.**
Application
- Seismic**
Movement
- Roof**
Use

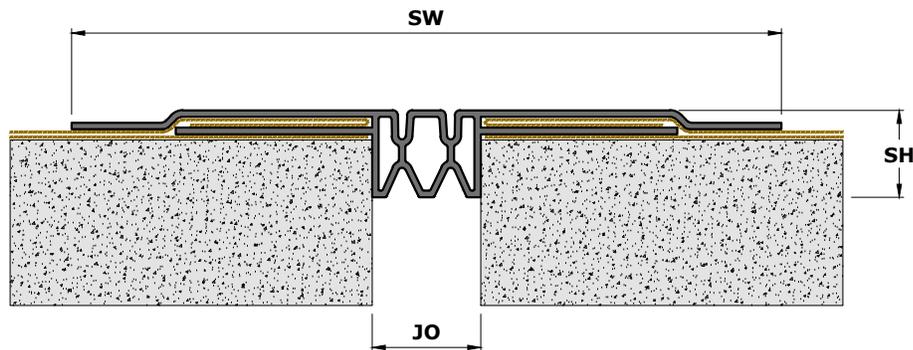

Details

Usage : Roof

Joint Width (mm) : 50 - 100

Optional : Fire Barrier

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
					Millimeter			
Straight (S) /Corner (C)	KJX 050	50	40	327	50	*	*	*
	KJX 075	75	40	352	50	*	*	*
	KJX 100	100	40	377	50	*	*	*

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.