



## Features

- Recess mounted system ideal for quick installation
- Firmly fixed dual durometer Santoprene gasket ideal for movement tractability without shearing or breaking
- Centering Bar system for wider gaps
- Extra large sizes available
- Commonly used system that is easy to install and maintain
- Suitable for internal/external applications
- System is suitable for full seismic movements
- Fire Barriers are optionally available

### Straight Application

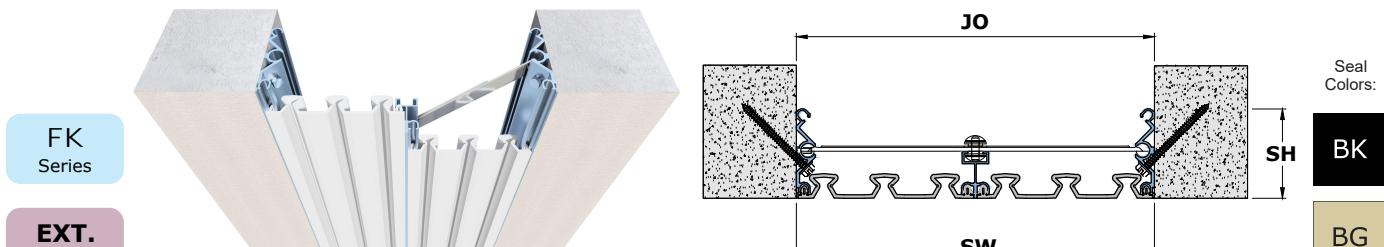

### Corner Application

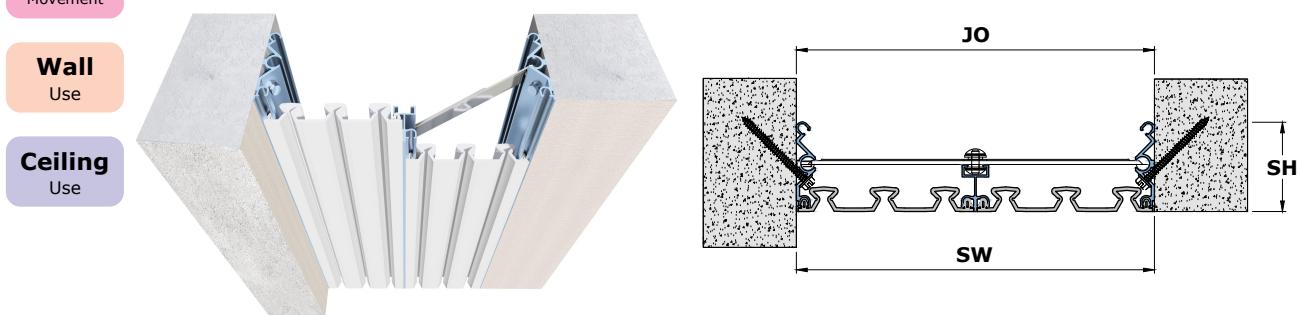

## Details

Usage : Wall/Ceiling

Joint Width (mm) : 38 - 600

Optional : Vapor/Fire Barrier

Wider Joint cover available at request

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
		Millimeter			Horizontal	Vertical	Shear	
Straight (S) /Corner (C)	FKX 025	38	60	38	50	50	Excellent	*
	FKX 050	50	60	50	50	50	Excellent	*
	FKX 075	75	60	75	50	50	Excellent	*
	FKX 100	100	60	100	50	50	Excellent	*
	FKX 150	150	60	150	50	50	Excellent	*
	FKX 200	200	75	200	50	50	Excellent	*
	FKX 250	250	75	250	50	50	Excellent	*
	FKX 300	300	75	300	50	50	Excellent	*
	FKX 450	450	75	450	50	50	Excellent	*
	FKX 600	600	75	600	50	50	Excellent	*

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.