


## Features

- Surface mounted system designed for retrofit installation
- Firmly fixed Santoprene gasket idea for movement tractability without shearing or breaking
- System is suitable for full seismic movements

- Commonly used system that is easy to install and maintain
- Unique design for gypsum board drywalls
- Fire Barriers are optionally available

### Straight Application FAS

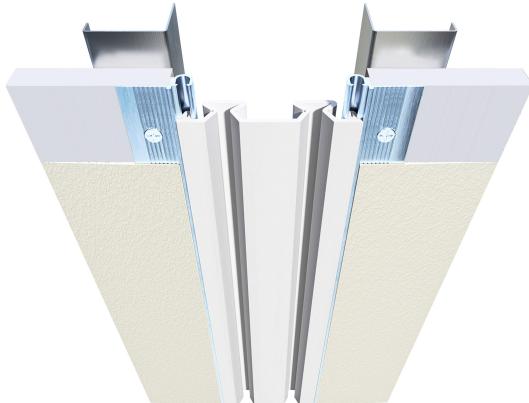


**FA**  
Series

**INT.**  
Application


**Seismic**  
Movement

**Wall**  
Use

**Ceiling**  
Use

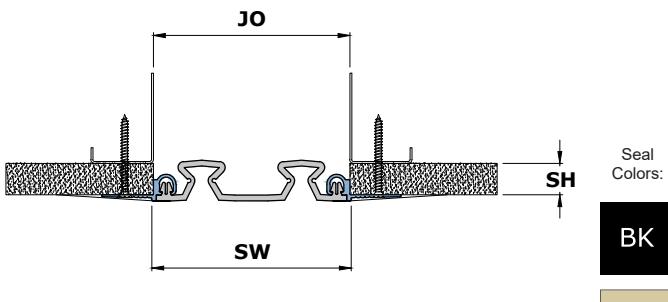

### Corner Application FAC

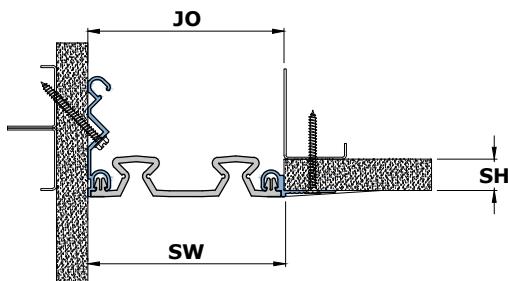

## Details

Usage : Wall/Ceiling

Joint Width (mm) : 38 - 150

Optional : Fire Barrier

Wider Joint cover available at request

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
		Millimeter			Horizontal	Vertical	Shear	
Straight (S)	FAS 025	38	16	40	50	50	Excellent	*
	FAS 050	50	16	52	50	50	Excellent	*
	FAS 075	75	16	77	50	50	Excellent	*
	FAS 100	100	16	102	50	50	Excellent	*
	FAS 150	150	16	152	50	50	Excellent	*
Corner (C)	FAC 025	38	16	39	50	50	Excellent	*
	FAC 050	50	16	51	50	50	Excellent	*
	FAC 075	75	16	76	50	50	Excellent	*
	FAC 100	100	16	101	50	50	Excellent	*
	FAC 150	150	16	151	50	50	Excellent	*

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.