

Features

- System designed for watertight installation
- Ideal for bridges as well as commercial kitchens
- EPDM/Neoprene Seal can be replaced easily and without much tools
- Available in 304 or 316 grade, Stainless Steel
- Resistant to salt and waste water
- Resistant to -40°C to $+150^{\circ}\text{C}$ ambient temperature

- Firmly anchored EPDM/Neoprene Seal is ideal for movement tractability as well as watertightness
- System designed for heavy duty application
- Resist heavy duty loads
- No bump structure is ADA compliant
- System is suitable for minor seismic movements

Straight Application AKS



AK
Series

EXT.
Application




INT.
Application

Thermal
Movement

Floor
Use

Water

Corner Application AKC

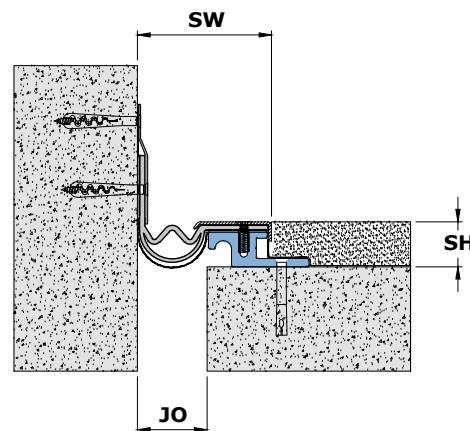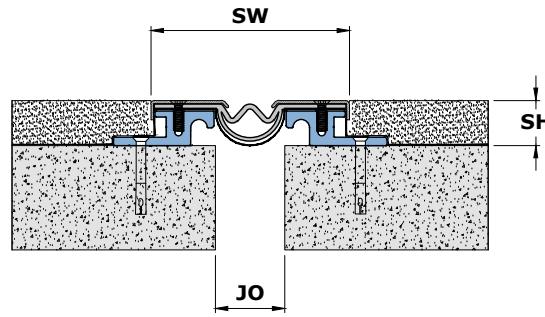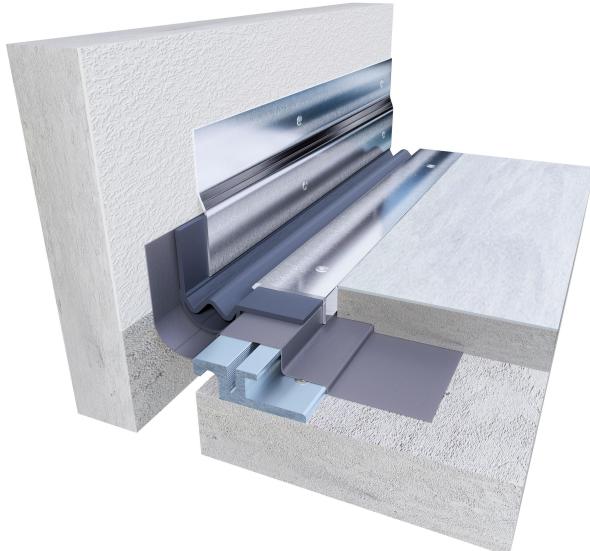

Details

Usage : Floor

Joint Width (mm) : 25 - 100

Optional : Fire Barrier

Application	Code	JO	SH	SW	\pm Movement (%)			Load (Ton)
					Millimeter			
Straight (S)	AKS 025	25	33	122	50	50	*	5
	AKS 050	50	33	143	50	50	*	5
	AKS 075	75	33	170	50	50	*	5
	AKS 100	100	33	194	50	50	*	5
Corner (C)	AKC 025	25	33	74	50	50	*	5
	AKC 050	50	33	96	50	50	*	5
	AKC 075	75	33	123	50	50	*	5
	AKC 100	100	33	148	50	50	*	5

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.