



Features

- System is designed for absorbing tile movements
- Commonly used for easy installation
- Popular Field Limitation Joint
- Available in Aluminum (XYA), Brass (XYB), Stainless Steel (XYS)

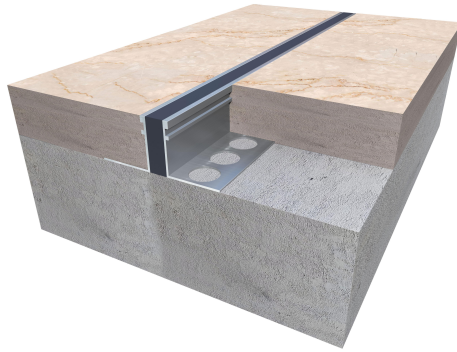

Straight Application XYA (Aluminum)

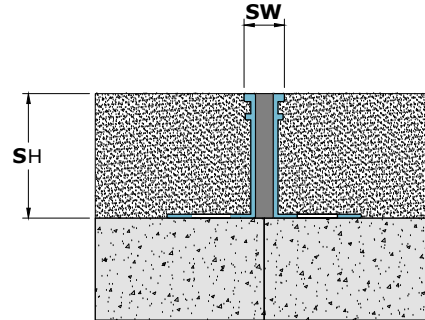

Seal Colors:

BK

BG

WH


GY

XY
Series


INT.
Application

Floor
Use

Straight Application XYS (Stainless)

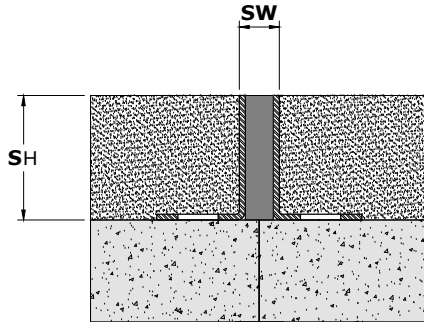

Straight Application XYB (Brass)

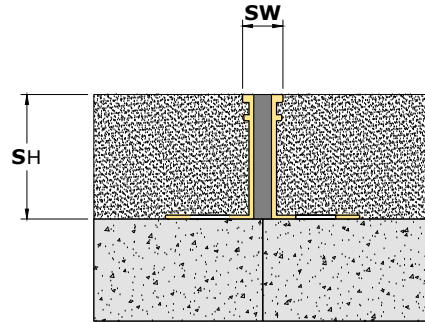

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
		Millimeter			Horizontal	Vertical	Shear	
Straight (S)	XYA 007	*	8	10	Limited	*	*	*
	XYA 010	*	11	10	Limited	*	*	*
	XYA 015	*	16	10	Limited	*	*	*
	XYA 020	*	21	10	Limited	*	*	*
	XYA 025	*	26	10	Limited	*	*	*
	XYA 030	*	31	10	Limited	*	*	*
Straight (S)	XYB 007	*	8	10	Limited	*	*	*
	XYB 010	*	11	10	Limited	*	*	*
	XYB 015	*	16	10	Limited	*	*	*
	XYB 020	*	21	10	Limited	*	*	*
	XYB 025	*	26	10	Limited	*	*	*
	XYB 030	*	31	10	Limited	*	*	*
Straight (S)	XYS 007	*	8	10	Limited	*	*	*
	XYS 010	*	11	10	Limited	*	*	*
	XYS 015	*	16	10	Limited	*	*	*
	XYS 020	*	21	10	Limited	*	*	*
	XYS 025	*	26	10	Limited	*	*	*
	XYS 030	*	31	10	Limited	*	*	*

Details

Usage : Floor

Sight Width (mm) : 10