


## Features

- System is designed for absorbing tile movements
- Commonly used for easy installation
- Popular Field Limitation Joint
- Available in Aluminum (XCA), Brass (XCB), Stainless Steel (XCS)

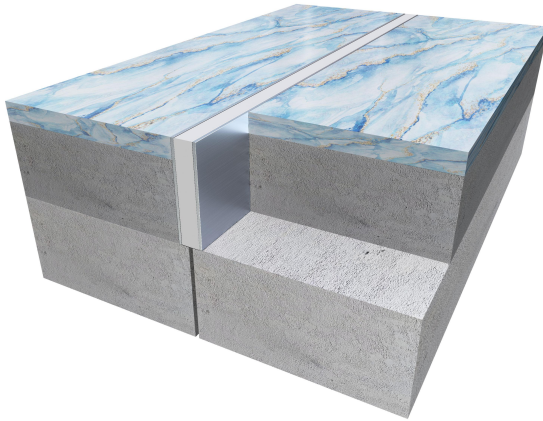


**XC**  
Series

**INT.**  
Application

**Floor**  
Use

### Straight Application XCA (Aluminum)

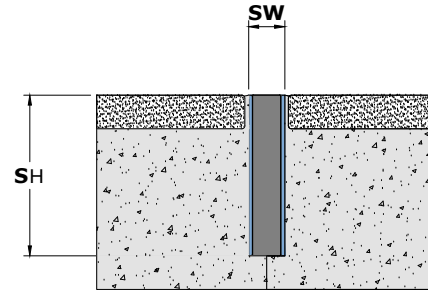

Seal  
Colors:


BK

BG


WH

GY

### Straight Application XCS (Stainless Steel)

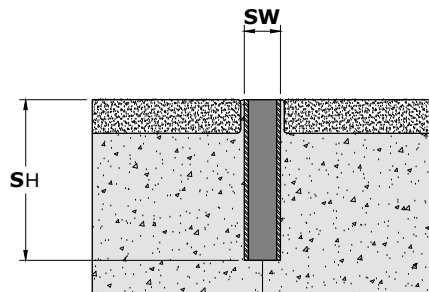

### Straight Application XCB (Brass)

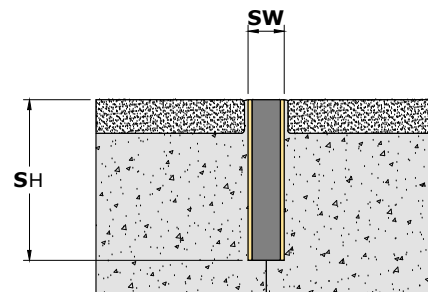

## Details

Usage : Floor

Sight Width (mm) : 9

| Application  | Code    | JO         | SH | SW | ± Movement (%) |          |       | Load (Ton) |
|--------------|---------|------------|----|----|----------------|----------|-------|------------|
|              |         | Millimeter |    |    | Horizontal     | Vertical | Shear |            |
| Straight (S) | XCA 030 | *          | 30 | 9  | Limited        | *        | *     | *          |
|              | XCA 040 | *          | 40 | 9  | Limited        | *        | *     | *          |
|              | XCA 050 | *          | 50 | 9  | Limited        | *        | *     | *          |
| Straight (S) | XCB 030 | *          | 30 | 9  | Limited        | *        | *     | *          |
|              | XCB 040 | *          | 40 | 9  | Limited        | *        | *     | *          |
|              | XCB 050 | *          | 50 | 9  | Limited        | *        | *     | *          |
| Straight (S) | XCS 030 | *          | 30 | 9  | Limited        | *        | *     | *          |
|              | XCS 040 | *          | 40 | 9  | Limited        | *        | *     | *          |
|              | XCS 050 | *          | 50 | 9  | Limited        | *        | *     | *          |