
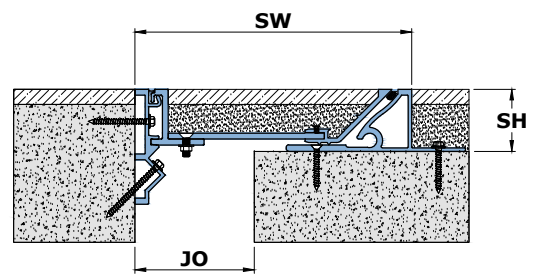


## Features

- System is designed to be installed in recessed floor
- Seismic Pan System for accomodating various floor finishes
- Negligible sight line makes system popular
- ADA compliant
- Load rated subject to joint opening
- Unique design makes one system suitable for floor/floor and floor/wall application
- System allows seismic movements
- System allows excellent shear movements
- Vapor and Fire Barriers are optionally available

### Straight Application

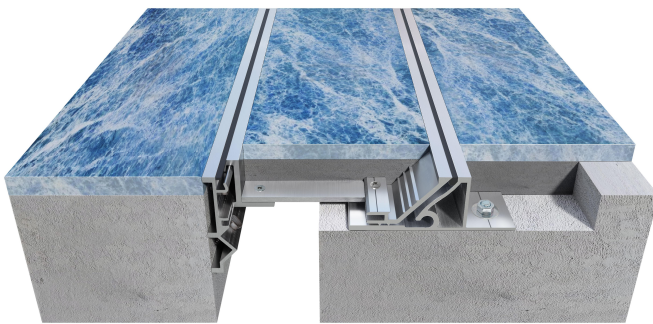



**EE**  
Series

**INT.**  
Application

**Seismic**  
Movement

**Floor**  
Use

### Corner Application

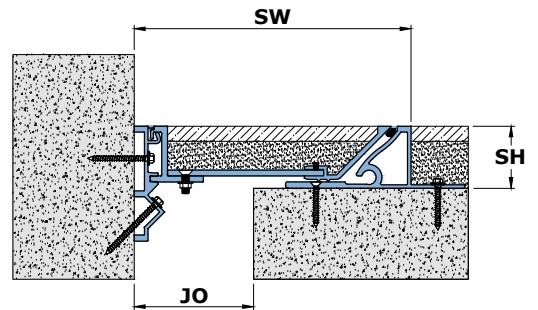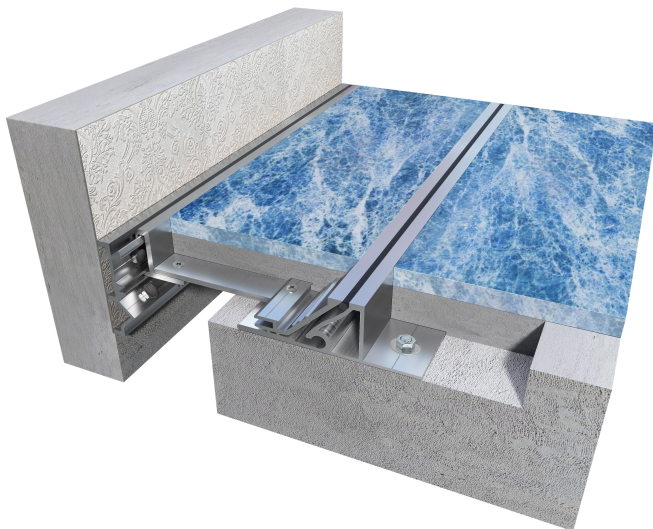

## Details

Usage : Internal Floor

Joint Width (mm) : 50 - 200

Optional : Vapor/Fire Barrier

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
		Millimeter			Horizontal	Vertical	Shear	
Straight (S) /Corner (C)	EEX 050	50	52	180	50	Excellent	Excellent	3
	EEX 100	100	52	230	50	Excellent	Excellent	2
	EEX 150	150	52	285	50	Excellent	Excellent	1
	EEX 200	200	52	360	50	Excellent	Excellent	1