
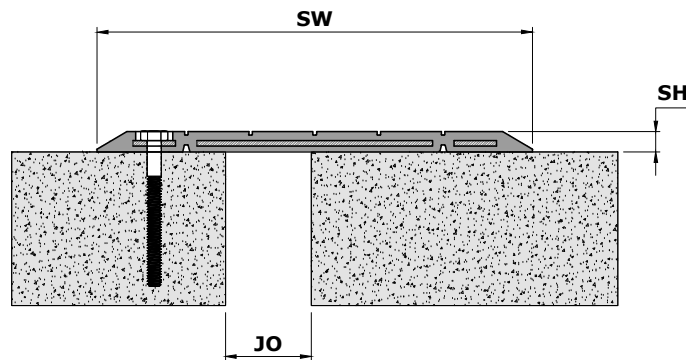


Features

- System is designed to be installed over finishes
- Heavy duty laminated rubber joint
- Ideal for vehicular traffic
- Steel reinforced core designed to withstand heavy traffic
- System allows full seismic movements
- UV stabilized
- Acid and alkali resistant
- System designed for easy maintenance and repair

Straight Application

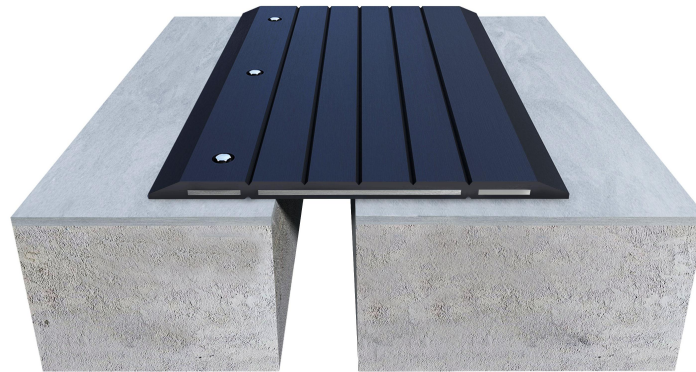

- HB Series
- EXT. Application
- Thermal Movement
- Seismic Movement
- Floor Use

Details

Usage : Floor	Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
			Millimeter			Horizontal	Vertical	Shear	
Joint Width (mm) : 35 - 110	Straight (S)	HBX 035	35	14	225	50	*	*	Heavy Duty
		HBX 060	60	14	305	50	*	*	
		HBX 085	85	14	355	50	*	*	
Optional : Fire Barrier		HBX 110	110	14	405	50	*	*	