


Features

- System designed for gypsum drywall/curtain wall
- Central plate allows swift between positive and negative movements
- For excellent result, choose to powder coat the cover plate to match neighboring wall finish
- Suitable for interior/exterior applications
- System allows excellent shear movements
- System allows full seismic movements
- Vapor and Fire Barriers are optionally available

Straight Application DMS

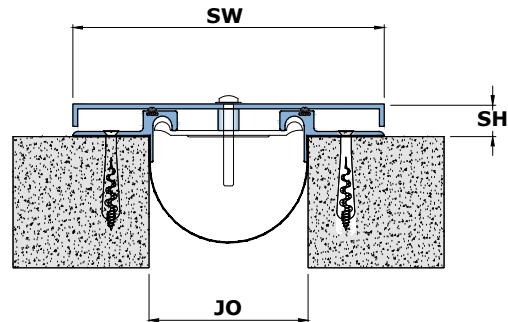

Powder Coat Finish:
Any RALColor



Anodized
Finishes:



DM
Series

EXT.
Application

INT.
Application


Seismic
Movement

Wall
Use

Ceiling
Use

Roof
Use

Corner Application DMC

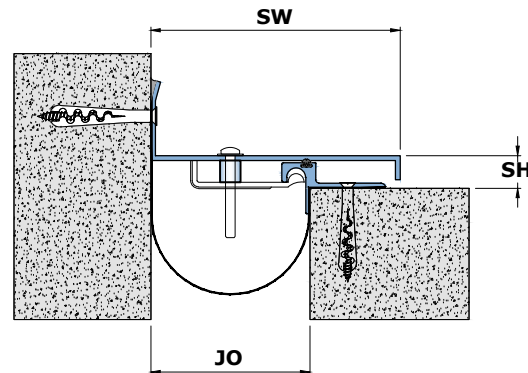

Details

Usage : Wall/Ceiling/Roof

Joint Width (mm) : 50 - 300

Optional : Vapor/Fire Barrier

Wider Joint cover available at request

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
		Millimeter			Horizontal	Vertical	Shear	
Straight (S)	DMS 050	50	20	102	50	25	Excellent	*
	DMS 075	75	20	140	50	25	Excellent	*
	DMS 100	100	20	196	50	25	Excellent	*
	DMS 150	150	20	246	50	25	Excellent	*
	DMS 200	200	20	315	50	25	Excellent	*
	DMS 300	300	20	463	50	25	Excellent	*
Corner (C)	DMC 050	50	20	99	25	25	Excellent	*
	DMC 075	75	20	123	25	25	Excellent	*
	DMC 100	100	20	157	25	25	Excellent	*
	DMC 150	150	20	232	25	25	Excellent	*
	DMC 200	200	20	307	25	25	Excellent	*
	DMC 300	300	20	457	25	25	Excellent	*