


Features

- System is designed for absorbing tile movements
- Firmly fixed Santoprene gasket idea for movement tractability without shearing or breaking
- System suitable for minor seismic movements
- Commonly used system that is easy to install and maintain
- System allows narrow shear movement


- System available with Brass Top (BT), Stainless Steel Top (ST), Brass Cap (BC), Steel Cap (SC) and Brass Insert (BI)
- No bump structure is ADA compliant
- Suitable for heavy pedestrian traffic and hand trolley loads
- Vapor and Fire Barriers are optionally available

Straight Application AAS



AA
Series

Corner Application AAC



INT.
Application

Thermal
Movement

Floor
Use

Corner Application AAC Recessed




Details

Usage : Internal Floor

Joint Width (mm) : 25 - 75

Optional : Vapor/Fire Barrier
Brass/SS Caps
Recessed Wall Frame

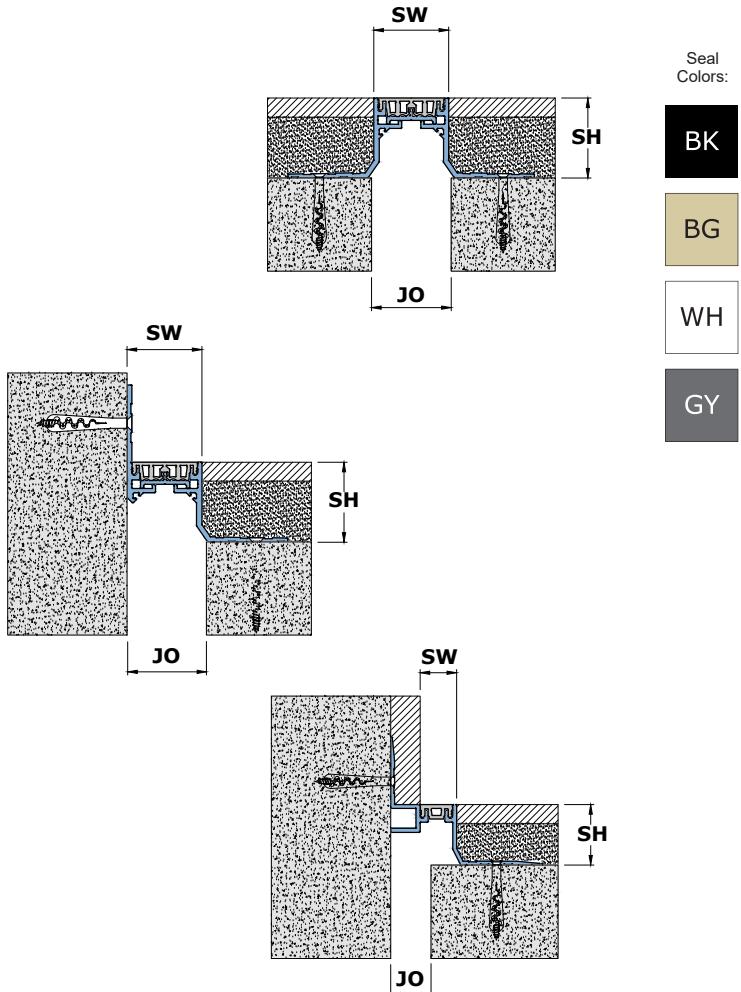

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
		Millimeter			Horizontal	Vertical	Shear	
Straight (S)	AAS 025	25	38	25	25	25	Narrow	3
	AAS 038	38	38	38	25	25	Narrow	3
	AAS 050	50	50	47	25	25	Narrow	2
	AAS 075	75	50	73	25	25	Narrow	2
Corner (C)	AAC 025	25	38	25	25	25	Narrow	3
	AAC 038	38	38	38	25	25	Narrow	3
	AAC 050	50	50	47	25	25	Narrow	2
	AAC 075	75	50	73	25	25	Narrow	2

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.