



Features

- Surface mounted system designed for retrofit installation
- Installation is recommended over finishes
- Firmly fixed Santoprene gasket idea for movement tractability without shearing or breaking
- System is suitable for minor seismic movements
- Commonly used system that is easy to install and maintain
- Allows narrow shear movement
- Suitable for heavy pedestrian traffic and hand trolley loads
- Vapor and Fire Barriers are optionally available

Straight Application ADS

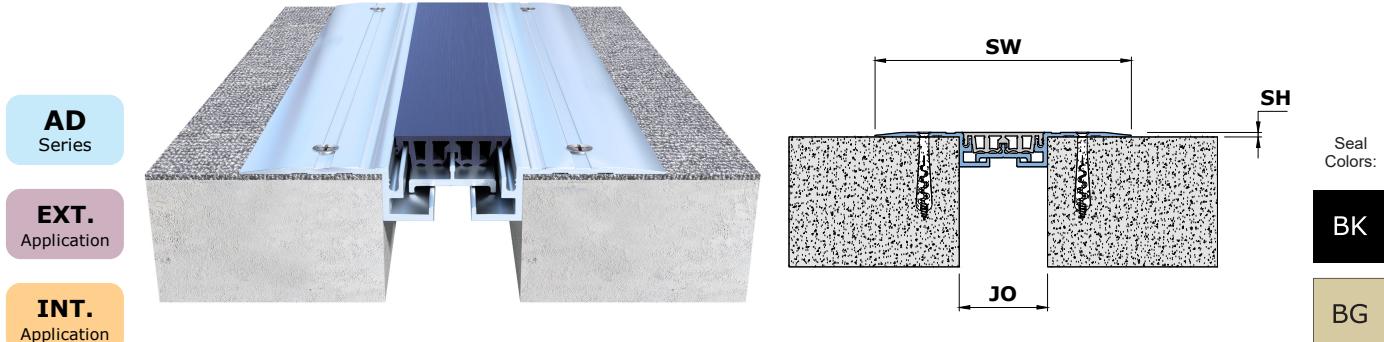

Corner Application ADC

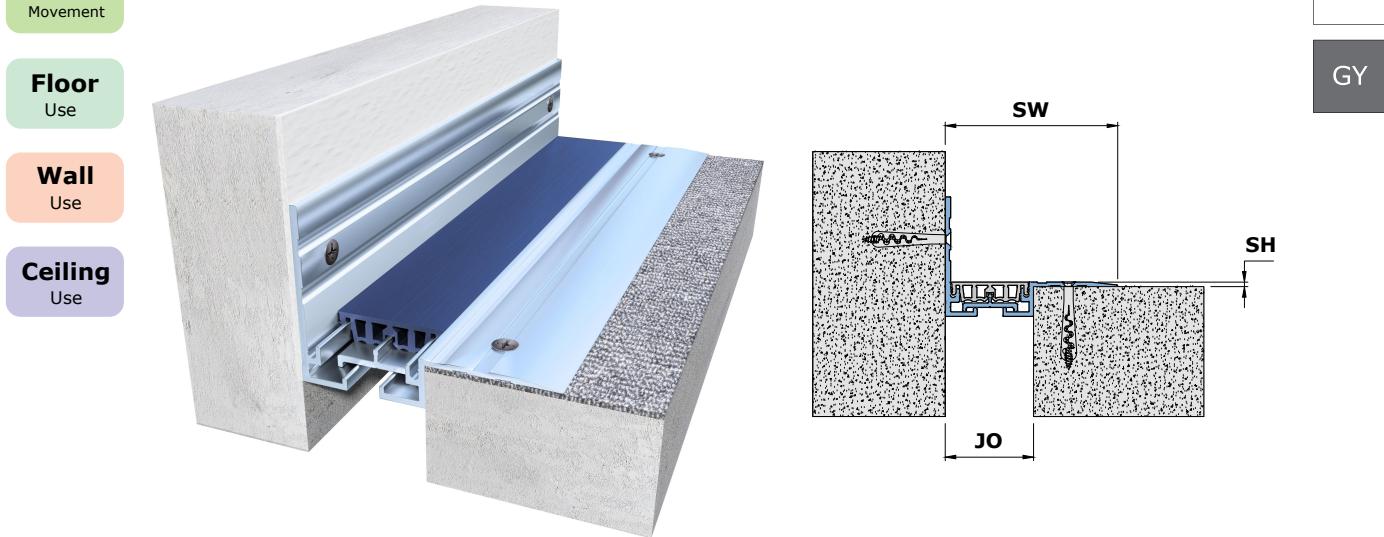

Details

Usage : Floor/Wall/Ceiling

Joint Width (mm) : 25 - 75

Optional : Vapor/Fire Barrier

Application	Code	JO	SH	SW	± Movement (%)			Load (Ton)
		Millimeter			Horizontal	Vertical	Shear	
Straight (S)	ADS 025	25	2.5	120	25	25	Narrow	3
	ADS 050	50	2.5	145	25	25	Narrow	2
	ADS 075	75	2.5	170	25	25	Narrow	2
Corner (C)	ADC 025	25	2.5	73	25	25	Narrow	3
	ADC 050	50	2.5	97	25	25	Narrow	2
	ADC 075	75	2.5	122	25	25	Narrow	2

As Prospec Specialties' policy is one of continual progress for the improvement of the company's services to its customers, the company reserves the right to modify the specifications of its products without notice.